


# PCLD-789D

## Amplifier and Multiplexer Board

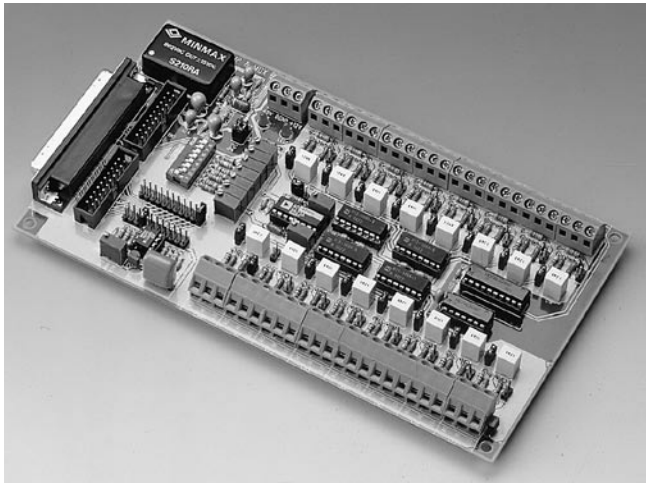

CE

### Features

- Multiplexes 16 differential inputs to one A/D input
- Expands a PC-LabCard™ product's analog inputs to 128 channels
- High-grade instrumentation amplifier provides switch selectable gains of 1, 2, 10, 50, 100, 200, 1,000
- On-board cold-junction compensation circuits for direct thermocouple measurement
- Built-in signal conditioning functions include filter, attenuator and current shunt
- Second connectors on-board allow daisy chaining
- Screw-clamp terminal blocks permit easy and reliable connections

### Introduction

PCLD-789D is a front-end signal conditioning and channel multiplexing daughterboard for use with PC-LabCard™ product's analog input ports. It multiplexes 16 differential input channels into a single A/D converter input channel. You can cascade up to ten PCLD-789Ds, allowing a single data acquisition card to access 160 analog input channels. PCLD-789D has DB37 and 20-pin flat cable connectors and lets your PCL-818L or PCL-818HD access up to 128 channels without using an additional digital output cable to select channels.

The PCLD-789D uses a high-grade instrumentation amplifier that provides switch-selectable gains of 1, 2, 10, 50, 100, 200 and 1,000. This amplifier lets you accurately measure low-level signals with your PC-LabCard™ product. The board also contains a cold-junction sensing circuit that allows direct temperature measurement from thermocouple transducers. A wide variety of thermocouples are supported with software compensation and linearization.

### Specifications

#### I/O

- **Cold-Junction Compensation** +24.4 mV/°C, 0 V at 0° C
- **Input Channels** 16 differential
- **Input Conditions**

Gains	CMRR	Nonlinearity	Setting Time
1,000	125 dB	0.005% FSR	75 $\mu$ sec.
100	115 dB	0.005% FSR	15 $\mu$ sec.
10	105 dB	0.007% FSR	15 $\mu$ sec.
1	85 dB	0.015% FSR	15 $\mu$ sec.

- **Input Range**  $\pm 10$  V maximum, depending on the selected gain
- **Output Range**  $\pm 10$  V maximum
- **Overvoltage Protection**  $\pm 30$  V continuous



#### General

- **Certifications** CE
- **Connectors**  
Controller: 1 x DB37 (male) connector  
2 x 20-pin flat cable connectors for daisy chaining
- **I/O:** Screw terminals
- **Dimensions (L x W)** 205 x 114 mm (8.1" x 4.5")
- **Mounting** 4 x screw holes for flat surface mounting
- **Power Consumption** +5 V @ 30 mA max, +12 V @ 80 mA max

### Applications

- Channel expansion
- Low level signal measurement
- Thermocouple measurement
- Signal amplification and conditioning

### Pin Assignments

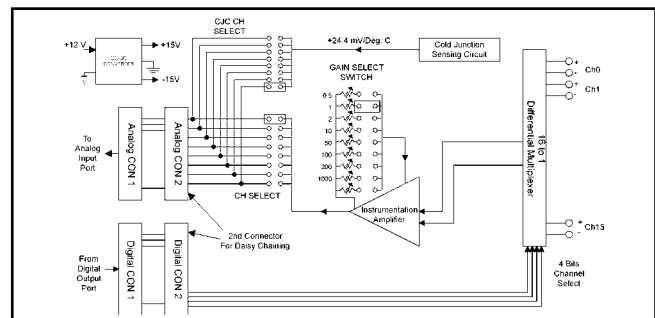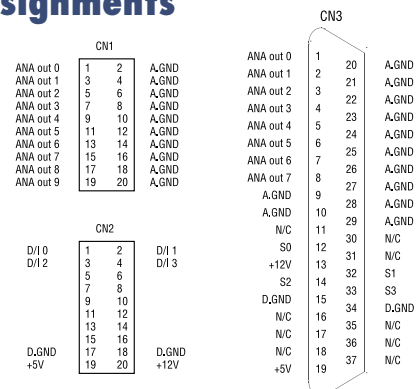

Block Diagram

### Ordering Information

- **PCLD-789D** Amplifier and Multiplexer Board with DB37 connector and 20-pin flat-cable connectors. (Includes DB37 and 20-pin flat cable assemblies)