

Strain Gage Input Modules, Wide Bandwidth

FEATURES

- INTERFACES TO 100 Ω THRU 10k Ω , FULL-BRIDGE, HALF-BRIDGE, OR QUARTER-BRIDGE STRAIN GAGES
- HIGH LEVEL VOLTAGE OUTPUTS
- 1500Vrms TRANSFORMER ISOLATION
- ANSI/IEEE C37.90.1-1989 TRANSIENT PROTECTION
- INPUT PROTECTED TO 240VAC CONTINUOUS
- FULLY ISOLATED EXCITATION SUPPLY
- 100dB CMR
- 10kHz SIGNAL BANDWIDTH
- $\pm 0.08\%$ ACCURACY
- $\pm 0.02\%$ LINEARITY
- $\pm 1\mu\text{V}/^\circ\text{C}$ DRIFT
- CSA CERTIFIED, FM APPROVED, CE COMPLIANT
- MIX AND MATCH SCM5B TYPES ON BACKPANEL

DESCRIPTION

Each SCM5B38 Strain Gage input module provides a single channel of Strain Gage input which is filtered, isolated, amplified, and converted to a high level analog voltage output (Figure 1). This voltage output is logic switch controlled, which allows these modules to share a common analog bus without the requirement of external multiplexers.

The SCM5B modules are designed with a completely isolated computer side circuit which can be floated to $\pm 50\text{V}$ from Power Common, pin 16. This complete isolation means that no connection is required between I/O Common and Power Common for proper operation of the output switch. If desired, the output switch can be turned on continuously by simply connecting pin 22, the Read-Enable pin to I/O Common, pin 19.

The SCM5B38 can interface to full-bridge or half-bridge transducers with a nominal resistance of 100 Ω to 10k Ω . A matched pair of bridge-completion resistors (to $\pm 1\text{mV}$ at $+10\text{V}$ excitation) allows use of low cost half-bridge or quarter-bridge transducers (Figures 2, 3, 4). The 10kHz bandwidth allows measurement of high speed processes such as vibration analysis.

Strain Gage excitation is provided from the module by a very stable 10V or 3.333V source. The excitation supply is fully isolated, allowing the amplifier inputs to operate over the full range of the excitation voltage. This feature offers significant flexibility in real world applications. Full scale sensitivities of 2mV/V, 3mV/V or 10mV/V are offered as standard. With 10V excitation, this results in $\pm 20\text{mV}$, $\pm 30\text{mV}$ or $\pm 100\text{mV}$ full scale input range producing $\pm 5\text{V}$ full scale output.

The input signal is processed through a pre-amplifier on the field side of the isolation barrier. This pre-amplifier has a gain-bandwidth product of 5MHz and is bandwidth limited to 10kHz. After amplification, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges. The module is powered from $+5\text{VDC}$, $\pm 5\%$.

Special input circuits on the SCM5B38 module provide protection of the signal inputs and the isolated excitation supply up to 240VAC.

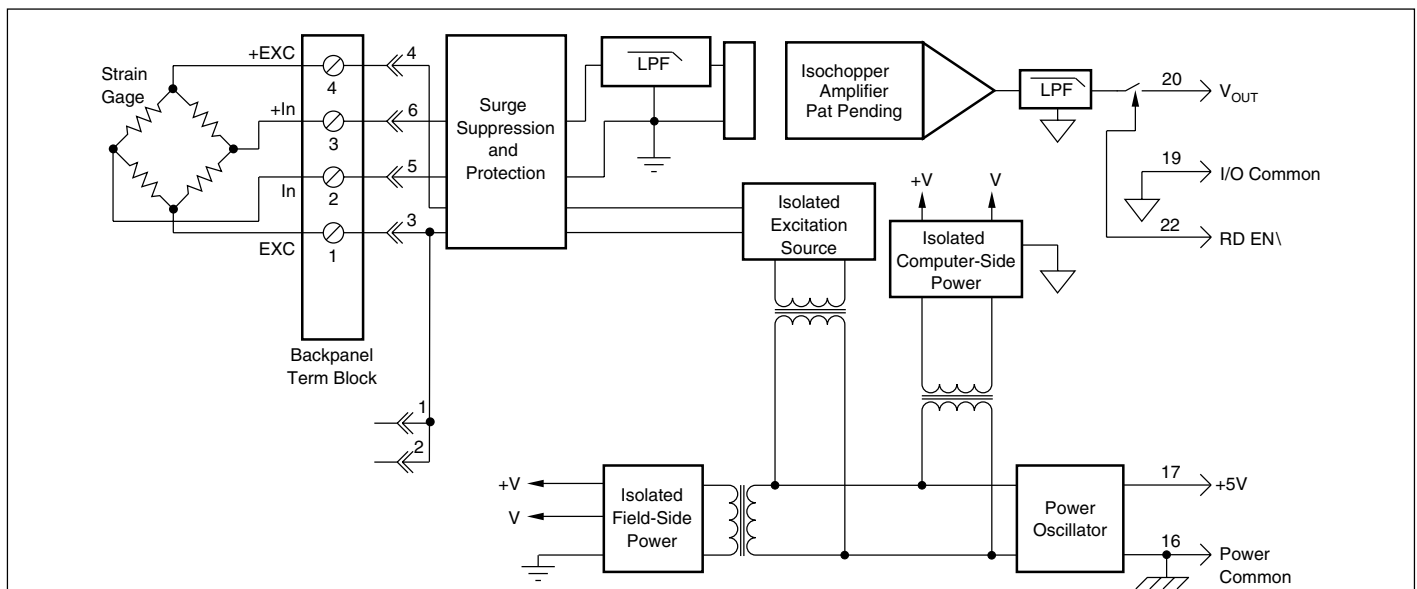


FIGURE 1. SCM5B38 Block Diagram.

SPECIFICATIONS Typical at $T_A = +25^{\circ}\text{C}$ and +5V power.

Module	Full Bridge SCM5B38-01, -02, -05, -06, -07	Half Bridge SCM5B38-03, -04
Input Range	$\pm 10\text{mV}$ to $\pm 100\text{mV}$	*
Input Bias Current	$\pm 0.3\text{nA}$	*
Input Resistance		
Normal	$50\text{M}\Omega$	*
Power Off	$40\text{k}\Omega$	*
Overload	$40\text{k}\Omega$	*
Signal Input Protection		
Continuous	240Vrms max	*
Transient	ANSI/IEEE C37.90.1-1989	*
Excitation Output (-02, -04, -05, -07)	+10V $\pm 3\text{mV}$	*
Excitation Output (-01, -03, -06)	+3.333V $\pm 2\text{mV}$	*
Excitation Load Regulation	$\pm 5\text{ppm}/\text{mA}$	*
Excitation Stability	$\pm 15\text{ppm}/^{\circ}\text{C}$	*
Half Bridge Voltage Level (-04)	NA	+5V $\pm 1\text{mV}$
Half Bridge Voltage Level (-03)	NA	+1.667V $\pm 1\text{mV}$
Isolated Excitation Protection		
Continuous	240Vrms max	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMV, Input to Output		
Continuous	1500Vrms max	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMR (50 or 60Hz)	100dB	*
NMR (-3dB at 10kHz)	120dB per Decade above 10kHz	*
Accuracy ⁽²⁾	$\pm 0.08\%$ Span $\pm 10\mu\text{V}$ RTI ⁽³⁾	*
Nonlinearity	$\pm 0.02\%$ Span	*
Stability		
Input Offset	$\pm 1\mu\text{V}/^{\circ}\text{C}$	*
Output Offset	$\pm 40\mu\text{V}/^{\circ}\text{C}$	*
Gain	$\pm 25\text{ppm}$ of Reading/ $^{\circ}\text{C}$	*
Noise		
Input, 0.1 to 10Hz	0.4 μV /rms	2 μV /rms
Output, 100kHz	10mVp-p	*
Bandwidth, -3dB	10kHz	*
Rise Time, 10 to 90% span	35 μs	*
Setting Time, to 0.1%	250 μs	*
Output Range	$\pm 5\text{V}$	*
Output Resistance	50Ω	*
Output Protection	Continuous Short to Ground	*
Output Selection Time (to $\pm 1\text{mV}$ of V_{OUT})	$6\mu\text{s}$ at $C_{\text{load}} = 0$ to 2000pF	*
Output Current Limit	$\pm 8\text{mA}$	*
Output Enable Control		
Max Logic "0"	+0.8V	*
Min Logic "1"	+2.4V	*
Max Logic "1"	+36V	*
Input Current, "0,1"	0.5 μA	*
Power Supply Voltage	+5VDC $\pm 5\%$	*
Power Supply Current	170mA Full Exc. Load, 70mA No Exc. Load	*
Power Supply Sensitivity	$\pm 2\mu\text{V}/\%$ RTI ⁽³⁾	*
Mechanical Dimensions	2.28" x 2.26" x 0.60" (58mm x 57mm x 15mm)	*
Environmental		
Operating Temperature Range	-40°C to $+85^{\circ}\text{C}$	*
Storage Temperature Range	-40°C to $+85^{\circ}\text{C}$	*
Relative Humidity	0 to 95% Noncondensing	*
Emissions	EN50081-1, ISM Group 1, Class A (Radiated, Conducted)	*
Immunity	EN50082-1, ISM Group 1, Class A (ESD, RF, EFT)	*

FIGURE 2. Full Bridge Connection.

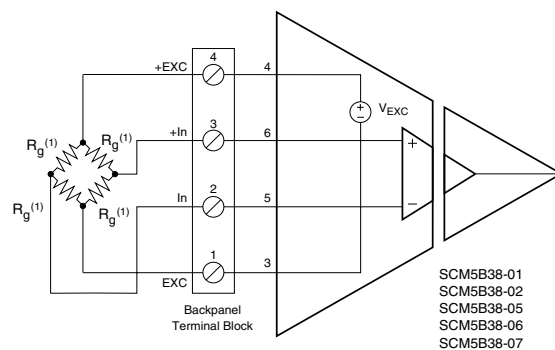


FIGURE 3. Half Bridge Connection.


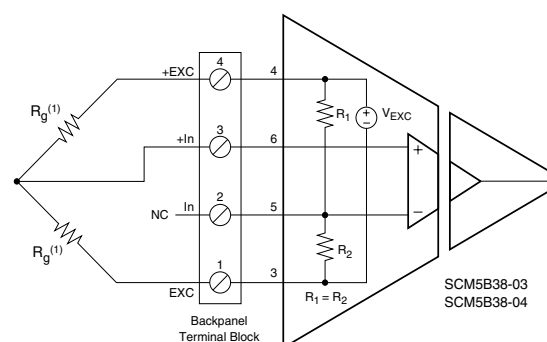


FIGURE 4. Quarter Bridge Connection.

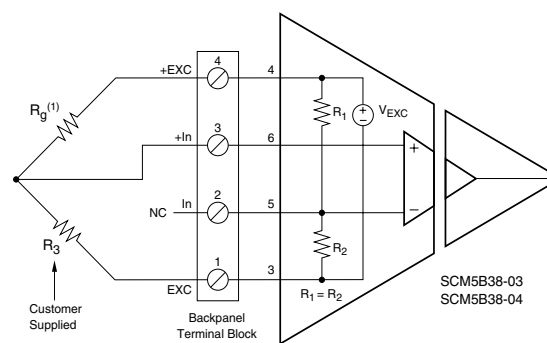

* Same as -01, -02, -05, -06, -07 modules.

NOTES: (1) Strain element. (2) Includes excitation error, nonlinearity, hysteresis and repeatability. (3) Referenced to input.

MODEL (10kHz)	INPUT BRIDGE TYPE	INPUT RANGE	EXCITATION	OUTPUT RANGE
SCM5B38-01	Full Bridge	100 Ω to 10k Ω	3.333V at 3mV/V Sensitivity	-5V to +5V
SCM5B38-02	Full Bridge	300 Ω to 10k Ω	10.0V at 3mV/V Sensitivity	-5V to +5V
SCM5B38-03	Half Bridge	100 Ω to 10k Ω	3.333V at 3mV/V Sensitivity	-5V to +5V
SCM5B38-04	Half Bridge	300 Ω to 10k Ω	10.0V at 3mV/V Sensitivity	-5V to +5V
SCM5B38-05	Full Bridge	300 Ω to 10k Ω	10.0V at 2mV/V Sensitivity	-5V to +5V
SCM5B38-06	Full Bridge	100 Ω to 10k Ω	3.333V at 10mV/V Sensitivity	-5V to +5V
SCM5B38-07	Full Bridge	300 Ω to 10k Ω	10.0V at 10mV/V Sensitivity	-5V to +5V

ORDERING INFORMATION