


Tinytag Connection Cables, Inductive pads and Connectors.

ACS-3010, ACS-3020, ACS-3030, ACS-9700, ACS-9701, ACS-9703, ACS-9750, CAB-0005, CAB-0007, CAB-0527, CAB-3239, CAB-3246, CAB-3233, USB-CAB

Issue 1
29th March 2005
E&OE



Tinytag Serial Download Cables and Inductive Pads

CAB-0005 Tinytag Transit/Tinytalk Serial Download Cable



For Use With	TG-0050, TGM-0040 and all Tinytalks
PC Connection	9-way Serial Port
Cable Length	1m
Weight	60g

CAB-0007 Tinytag/Tinyview Serial Download Cable



For Use With	All Tinytag Ultra, Tinytag Plus and Tinyview Plus data loggers
PC Connection	9-way Serial Port
Cable Length	1m
Weight	60g

ACS-3010 Tinytag Transit Serial Inductive Pad



For Use With	TG-3080, TG-3105, TG-3110 & TG-3115
PC Connection	9-way Serial Port
Cable Length	1m
Weight	200g
Battery Type	9V PP3 Alkaline battery
Replacement Interval	Annually


ACS-3020 General Tinytag Serial Inductive Pad



For Use With	All Inductive Loggers
PC Connection	9-way Serial Port
Cable Length	1m
Weight	245g
Battery Type	9V PP3 Alkaline battery
Replacement Interval	Annually

Tinytag USB PC Connection Cables and Inductive Pads

CAB-USB USB to Serial Converter

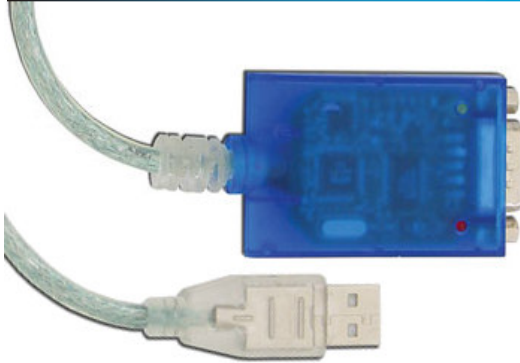

For Use With	All Loggers
PC Connection	USB Port
Cable Length	1m
Weight	75g

Notes

A CAB-0005 or CAB-0007 cable will be required to connect to the cable logger of your choice.

The CAB-USB cable can also be used with the ACS-3010 and ACS-3020 inductive pads if required.

A CD containing software drivers for the cable is supplied.

Supported operating systems are Windows 98SE, ME, 2000 and XP.

ACS-3030 General USB Inductive Pad



For Use With	All Inductive Loggers
PC Connection	USB Port
Cable Length	1m
Weight	170g

Notes

A CD containing software drivers for the pad is supplied.

Supported operating systems are Windows 98SE, ME, 2000 and XP.

Tinytag Connection Accessories

CAB-0527 CAB-0005 to CAB-0007 Converter



Converts a CAB-0005 into a CAB-0007.

For Use With	CAB-0005 and all Tinytag Ultra, Tinytag Plus and Tinyview Plus data loggers.
---------------------	--

Cable Length	0.2m
Weight	16g

Tinytag/Tinytalk Input Cables

CAB-3239 Tinytag Voltage/XP Input Lead



For Use With TGPR-0704, TGPR-0705, TGPR-0805 & TGPR-1002

Cable Length 1m
Weight 50g

Connection Information

Plug Pin No.	Colour	Function
A	Red	2.5V Reference
B	Black	12V (NOT TGPR-0704)
C	Blue	Sense Line (TGPR-0704)
D	Brown	Common/0V
E	White	Signal Input

CAB-3246 Tinytag Current, Millivolt, Count Input Lead



For Use With TGPR-0804, TGPR-1001 and TGPR-1201

Cable Length 1m
Weight 30g

Connection Information

Plug Pin No.	Colour	Function
A	Blue	Common/0V
B	Red	Signal Input

CAB-3233 Tinytalk Voltage Input Lead



For Use With TK-0702

Cable Length 0.2m
Weight 5g

Connection Information

Jack Plug	Colour	Function
Tip	White	Sense Line
Ring	Yellow	Signal Input
Shank	Black	Common/0V

Tinytag Input Plugs

ACS-9700 2 Pin Plug



For Use With TGPR-0804, TGPR1001 and TGPR-1201

Weight 15g

Connection Information

Plug Pin No.	Function
A	Common/0V
B	Signal Input

ACS-9701 3 Pin Plug



For Use With All Tinytag Ultra*, Tinytag Plus and Tinyview Plus data loggers

Weight 15g

Connection Information

Plug Pin No.	Function
A	RX
B	TX
C	Ground

*To use with the Tinytag Ultra remove the threaded retaining ring.

ACS-9703 5 Pin Plug




For Use With TGPR-0704, TGPR-0705, TGPR-0805 & TGPR-1002

Weight 15g

Connection Information

Plug Pin No.	Function
A	2.5V Reference
B	12V (NOT TGPR-0704)
C	Sense Line (TGPR-0704)
D	Common/0V
E	Signal Input

ACS-9750 K Type Thermocouple Plug

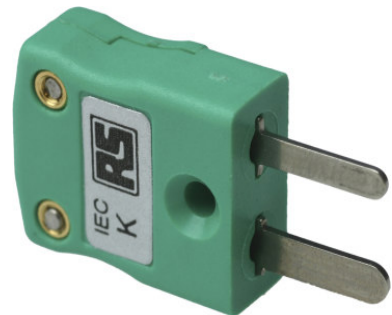

For Use With TGI-3250

Weight 5g