

SCM5B40/41

Analog Voltage Input Modules, Wide Bandwidth

FEATURES

- ACCEPTS MILLIVOLT AND VOLTAGE LEVEL SIGNALS
- HIGH LEVEL VOLTAGE OUTPUTS
- 1500Vrms TRANSFORMER ISOLATION
- ANSI/IEEE C37.90.1-1989 TRANSIENT PROTECTION
- INPUT PROTECTED TO 240VAC CONTINUOUS
- 100dB CMR
- 10kHz SIGNAL BANDWIDTH
- $\pm 0.05\%$ ACCURACY
- $\pm 0.02\%$ LINEARITY
- $\pm 1\mu\text{V}/^\circ\text{C}$ DRIFT
- CSA CERTIFIED, FM APPROVED, CE COMPLIANT
- MIX AND MATCH SCM5B TYPES ON BACKPANEL

DESCRIPTION

Each SCM5B40 and SCM5B41 wide bandwidth voltage input module provides a single channel of analog input which is amplified, isolated, and converted to a high level analog voltage output (Figure 1). This voltage output is logic-switch controlled, allowing these modules to share a common analog bus without the requirement of external multiplexers.

The SCM5B modules are designed with a completely isolated computer side circuit which can be floated to $\pm 50\text{V}$ from Power Common, pin 16. This complete isolation means that no connection is required between I/O Common and Power Common for proper operation of the output switch. If desired, the output switch can be turned on continuously by simply connecting pin 22, the Read-Enable pin to I/O Common, pin 19.

The input signal is processed through a pre-amplifier on the field side of the isolation barrier. This pre-amplifier has a gain-bandwidth product of 5MHz and is bandwidth limited to 10kHz. After amplification, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges. The module is powered from +5VDC, $\pm 5\%$.

A special input circuit on the SCM5B40 and SCM5B41 modules provides protection against accidental connection of power-line voltages up to 240VAC.

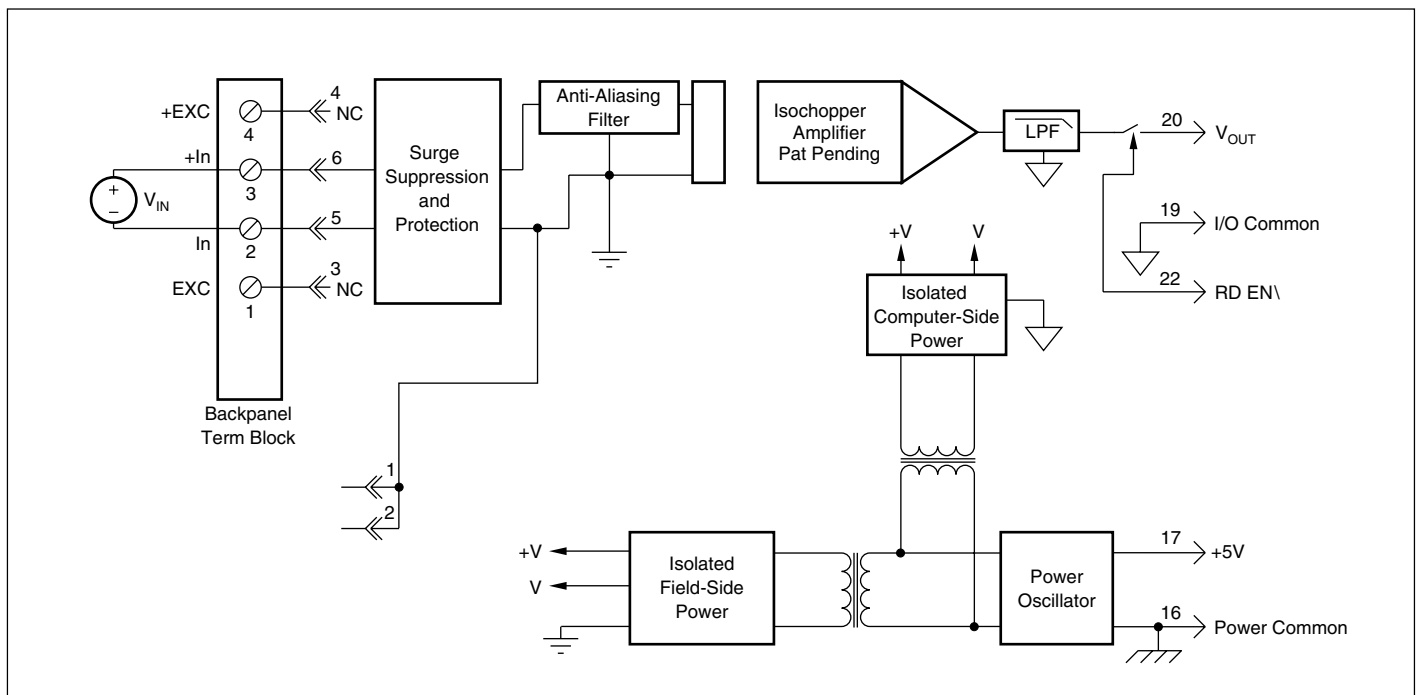


FIGURE 1. SCM5B40/41 Block Diagram.

SPECIFICATIONS Typical at $T_A = +25^\circ\text{C}$ and +5V Power.

Module	SCM5B40	SCM5B41
Input Range	$\pm 10\text{mV}$ to $\pm 100\text{mV}$	$\pm 1\text{V}$ to $\pm 40\text{V}$
Input Bias Current	$\pm 0.5\text{nA}$	$\pm 0.05\text{nA}$
Input Resistance		
Normal	$200\text{M}\Omega$	$650\text{k}\Omega$ (minimum)
Power Off	$40\text{k}\Omega$	$650\text{k}\Omega$ (minimum)
Overload	$40\text{k}\Omega$	$650\text{k}\Omega$ (minimum)
Input Protection		
Continuous	240Vrms Max	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMV, Input to Output		
Continuous	1500Vrms max	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMR (50Hz or 60Hz)	100dB	*
NMR (-3dB at 10kHz)	120dB per Decade above 10kHz	*
Accuracy ⁽¹⁾	$\pm 0.05\%$ Span $\pm 10\mu\text{V}$ RTI ⁽²⁾ $\pm 0.05\%$ (V_z ⁽³⁾)	$\pm 0.05\%$ span $\pm 0.2\text{mV}$ RTI ⁽²⁾ $\pm 0.05\%$ (V_z ⁽³⁾)
Nonlinearity	$\pm 0.02\%$ Span	*
Stability		
Input Offset	$\pm 1\mu\text{V}/^\circ\text{C}$	$\pm 20\mu\text{V}/^\circ\text{C}$
Output Offset	$\pm 40\mu\text{V}/^\circ\text{C}$	*
Gain	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 50\text{ppm}/^\circ\text{C}$
Noise		
Input, 0.1 to 10Hz	$0.4\mu\text{Vrms}$	$2\mu\text{Vrms}$
Output, 100kHz	10mVp-p	*
Bandwidth, -3dB	10kHz	*
Rise Time, 10 to 90% Span	$35\mu\text{s}$	*
Settling Time, to 0.1%	$250\mu\text{s}$	*
Output Range	$\pm 5\text{V}$ or 0V to $+5\text{V}$	*
Output Resistance	50Ω	*
Output Protection	Continuous Short to Ground	*
Output Selection Time (to $\pm 1\text{mV}$ of V_{OUT})	$6\mu\text{s}$ at $C_{\text{load}} = 0$ to 2000pF	*
Output Current Limit	$\pm 8\text{mA}$	*
Output Enable Control		
Max Logic "0"	$+0.8\text{V}$	*
Min Logic "1"	$+2.4\text{V}$	*
Max Logic "1"	$+36\text{V}$	*
Input Current, "0", "1"	$0.5\mu\text{A}$	*
Power Supply Voltage	$+5\text{VDC} \pm 5\%$	*
Power Supply Current	30mA	*
Power Supply Sensitivity	$\pm 2\mu\text{V}/\%$ RTI ⁽²⁾	$\pm 200\mu\text{V}/\%$ RTI ⁽²⁾
Mechanical Dimensions	$2.28" \times 2.26" \times 0.60"$ ($58\text{mm} \times 57\text{mm} \times 15\text{mm}$)	*
Environmental		
Operating Temp. Range	-40°C to $+85^\circ\text{C}$	*
Storage Temp. Range	-40°C to $+85^\circ\text{C}$	*
Relative Humidity	0 to 95% Noncondensing	*
Emissions	EN50081-1, ISM Group 1, Class A (Radiated, Conducted)	*
Immunity	EN50082-1, ISM Group 1, Class A (ESD, RF, EFT)	*

* Same specification as SCM5B40.
 NOTES: (1) Includes nonlinearity, hysteresis and repeatability.
 (2) RTI = Referenced to input.
 (3) V_z is the input voltage that results in 0V output.

ORDERING INFORMATION

MODEL	INPUT RANGE	OUTPUT RANGE
SCM5B40-01	-10mV to $+10\text{mV}$	-5V to $+5\text{V}$
SCM5B40-02	-50mV to $+50\text{mV}$	-5V to $+5\text{V}$
SCM5B40-03	-100mV to $+100\text{mV}$	-5V to $+5\text{V}$
SCM5B40-04	-10mV to $+10\text{mV}$	0V to $+5\text{V}$
SCM5B40-05	-50mV to $+50\text{mV}$	0V to $+5\text{V}$
SCM5B40-06	-100mV to $+100\text{mV}$	0V to $+5\text{V}$
SCM5B41-01	-1V to $+1\text{V}$	-5V to $+5\text{V}$
SCM5B41-02	-5V to $+5\text{V}$	-5V to $+5\text{V}$
SCM5B41-03	-10V to $+10\text{V}$	-5V to $+5\text{V}$
SCM5B41-04	-1V to $+1\text{V}$	0V to $+5\text{V}$
SCM5B41-05	-5V to $+5\text{V}$	0V to $+5\text{V}$
SCM5B41-06	-10V to $+10\text{V}$	0V to $+5\text{V}$
SCM5B41-07	-20V to $+20\text{V}$	-5V to $+5\text{V}$
SCM5B41-08	-20V to $+20\text{V}$	0V to $+5\text{V}$
SCM5B41-09	-40V to $+40\text{V}$	-5V to $+5\text{V}$
SCM5B41-10	-40V to $+40\text{V}$	0V to $+5\text{V}$