ARK-6610/6620 Compact Embedded Chassis for Mini-ITX Motherboard



Features

- Front I/O interfaces with one expansion slot
- Reserves various cutouts for COM, DVI/LVDS, S/C-video, USB, and WLAN antenna
- Shockproof disk drive bay for one slim CD/DVD-ROM and one 3.5" hard disk
- Bottom door for access to CF or mini-PCI on the solder side of motherboard
- Optional 180 W or 270 W AC ATX PFC power supply with power cord hook
- LED indicators for system fault detection
- · Easy-to-maintain system fan and reusable filter
- Optional WLAN 802.11 b/g module



Specifications

| - | | | |
|--------------------------|------------------------|-------------------------------------------|-----------------------------------------|
| | | ARK-6610 | ARK-6620 |
| Disk Drive Bay | Slim Optical Drive | 1 | - |
| | 3.5" (internal) | 1 | 1 |
| I/O Interface | COM | 5 | 2 |
| | USB | 2 | - |
| | DVI/LVDS | 2 | 1 |
| | S/C-Video | 1 | 1 |
| | WLAN Antenna | 1 | 1 |
| Cooling | Fan | 1 (9 cm / 52.5 CFM) | 2 (6 cm / 27.7 CFM, each) |
| | Air Filter | Yes | Yes |
| Miscellaneous | LED Indicators | Power, HDD, temperature | Power, HDD, temperature |
| | Control | Power switch | Power switch |
| Environment | | Operating | Non-operating |
| | Temperature | 0 ~ 40° C (32 ~ 104° F) | -20 ~ 60° C (-4 ~ 140° F) |
| | Humidity | 10 ~ 85%, 40° C, non-condensing | 10 ~ 95%, @ 40° C, non-condensing |
| | Vibration (5 ~ 500 Hz) | 1 Grms | 2 G |
| | Shock | 10 G (with 11ms duration, half sine wave) | 30 G |
| Physical Characteristics | Dimensions (W x H x D) | 250 x 156 x 253 (9.8" x 6.1" x 10") | 272 x 88 x 232 mm (10.7" x 3.5" x 9.1") |
| | Weight | 4.76 kg (10.47 lb) | 3.49 kg (7.68 lb) |

Front View

ARK-6610



Inside View

ARK-6610

Shockproof disk drive bay for one 3.5" HDD and one slim optical disk drive



System fan with filter

AC 180 W PSU

ARK-6620




ARK-6620




Two system fans with one reusable filter

AC 180 W PSU

ARK-6610/6620

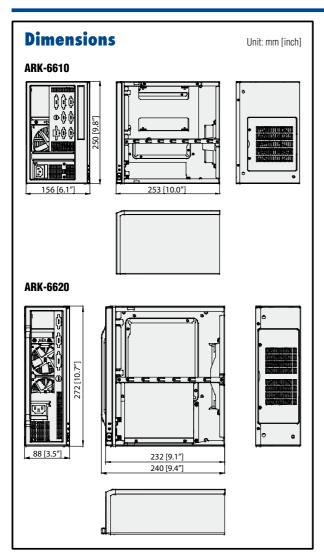

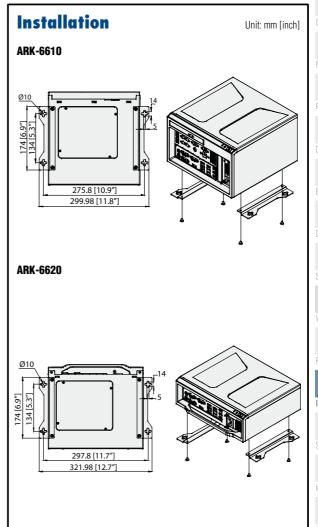

Chassis Ordering Information

| Part Number | Power Supply | Motherboard | Regulation |
|----------------|--------------|-------------|------------|
| ARK-6610-00XBE | - | - | CE, FCC |
| ARK-6610-18ZBE | 1757000878 | - | CE, FCC |
| ARK-6620-00XBE | - | - | CE, FCC |
| ARK-6620-18ZBE | 1757000878 | - | CE, FCC |

Optional Accessories

| Part Number | Description |
|---------------|---------------------------------------------------------------|
| 1700003434 | TV-out cable |
| 1700003435 | DVI cable |
| 1750002561 | 52.5 CFM, 92 x 92 x 25.4 mm system cooling fan (For ARK-6610) |
| 1750002580 | 27.7 CFM, system cooling fan 60 x 60 x 13 mm (For ARK-6620) |
| 989K008732 | VESA mounting kit for ARK-6620 |
| 1700008982 | SATA power cable for slim ODD |
| ARK-WLAN-USBE | Frame module to support wireless LAN with USB interface |
| | |

Fanless Panel PCs