



# DSCA30/31

## Analog Voltage Input Signal Conditioners

### FEATURES

- ACCEPTS MILLIVOLT AND VOLTAGE LEVEL SIGNALS
- INDUSTRY STANDARD OUTPUT OF EITHER 0 to 10V/±10V, 0 to 20mA, or 4 to 20mA
- 1500Vrms TRANSFORMER ISOLATION
- ANSI/IEEE C37.90.1-1989 TRANSIENT PROTECTION
- INPUT PROTECTED TO 240VAC CONTINUOUS
- TRUE 3-WAY ISOLATION
- WIDE RANGE OF SUPPLY VOLTAGE
- 160dB CMR
- 85dB NMR AT 60Hz, 80dB at 50Hz
- ±0.03% ACCURACY
- ±0.01% LINEARITY
- EASILY MOUNTS ON STANDARD DIN RAIL
- CSA AND FM APPROVALS PENDING

### DESCRIPTION

Each DSCA30/31 voltage input module provides a single channel of analog input which is filtered, isolated, amplified, and converted to a high level voltage output. Signal filtering is accomplished with a five-pole filter which provides 85dB of normal-mode-rejection at 60Hz and 80dB at 50Hz. An anti-aliasing pole is located on the field side of the isolation barrier, and the other four poles are on the system side. After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges.

Module output is either voltage or current. For current output models a dedicated loop supply is provided at terminal 3 (+OUT) with loop return located at terminal 4 (-OUT). The system-side load may be either floating or grounded.

Special input circuits provide protection against accidental connection of power-line voltages up to 240VAC and against transient events as defined by ANSI/IEEE C37.90.1-1989. Protection circuits are also present on the signal output and power input terminals to guard against transient events and power reversal. Signal and power lines are secured to the module using screw terminals which are in pluggable terminal blocks for ease of system assembly and reconfiguration.

The modules have excellent stability over time and do not require recalibration, however, zero and span settings are adjustable up to ±5% to accommodate situations where fine-tuning is desired. The adjustments are made using potentiometers located under the front panel label and are non-interactive for ease of use.

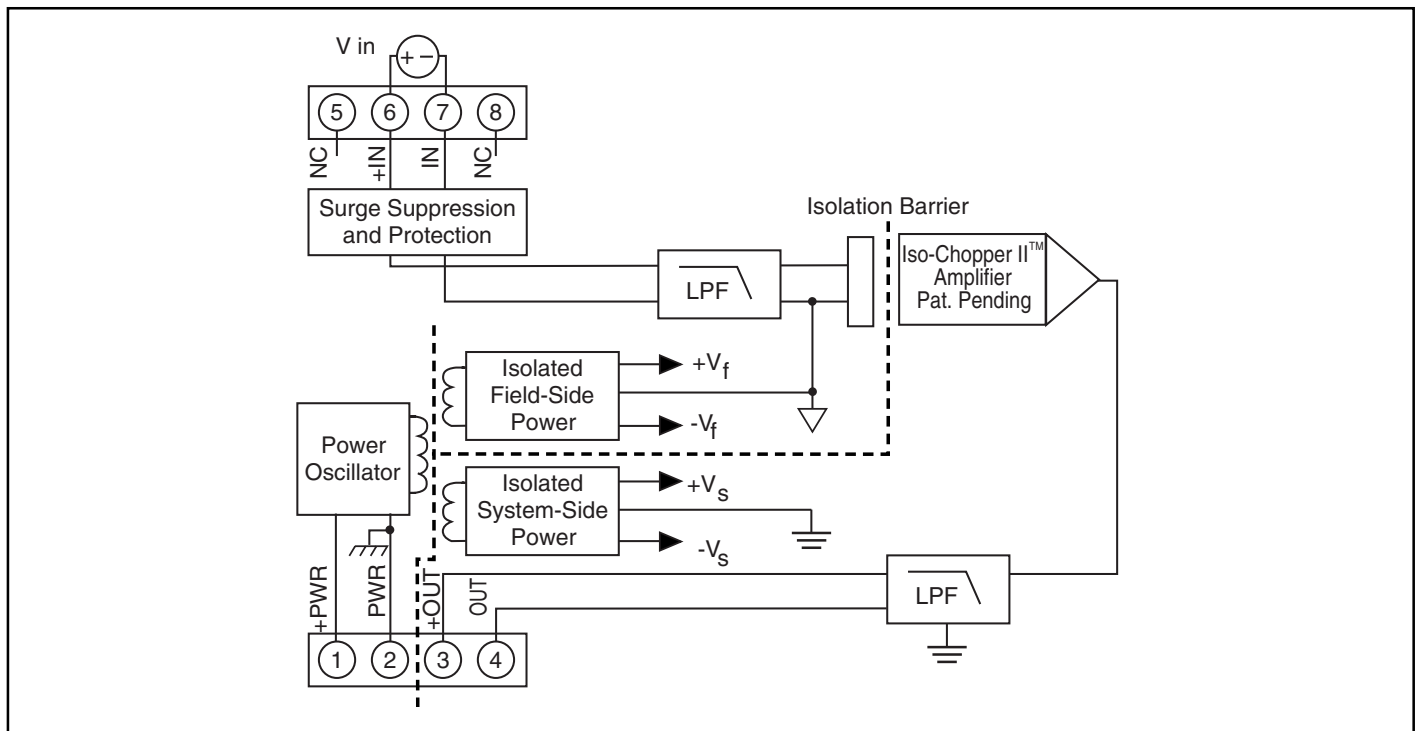


Fig 1: DSCA30/31 Block Diagram

## SPECIFICATIONS Typical at T<sub>A</sub> = +25°C and +24V supply voltage

Model	DSCA30	DSCA31
Input Range	±10mV to +100mV	±1V to ±40V
Input Bias Current	±0.5nA	±0.05nA
Input Resistance		
Normal	50MΩ	500kΩ
Power Off	65kΩ	500kΩ
Overload	65kΩ	500kΩ
Input Protection		
Continuous	240Vrms max	*
Transient	ANSI/IEEE C37.90.1-1989	*
Output Range	See Ordering Information	
Load Resistance (I <sub>OUT</sub> )	600Ω max	*
Current Limit	8mA (V <sub>OUT</sub> ), 30mA (I <sub>OUT</sub> )	*
Output Protection		
Short to Ground	Continuous	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMV, Input to Output, Input to Power		
Continuous	1500Vrms max	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMV, Output to Power		
Continuous	50VDC max	*
CMR (50Hz or 60Hz)	160dB	*
Accuracy <sup>(1)</sup>	±0.03% Span	*
Nonlinearity	±0.01% Span	*
Adjustability	±5% zero and span	*
Stability		
Input Offset	±0.5μV/°C	±5μV/°C
Output Offset	±6ppm/°C (V <sub>OUT</sub> ), ±20ppm/°C (I <sub>OUT</sub> )	*
Zero Suppression	±50ppm(V <sub>Z</sub> ) <sup>(2)</sup> /°C	*
Gain	±35ppm/°C	±55ppm/°C
Output Noise, 100kHz Bandwidth	250μVrms (V <sub>OUT</sub> ), 1μArms (I <sub>OUT</sub> )	*
Bandwidth, -3dB	3Hz	*
NMR	85dB at 60Hz, 80dB at 50Hz	*
Response Time, 90% Span	165ms	*
Power Supply		
Voltage	15V to 30V	*
Current	25mA (V <sub>OUT</sub> ), 45mA (I <sub>OUT</sub> )	*
Sensitivity	±0.0001%/°	*
Protection		
Reverse Polarity	Continuous	*
Transient	ANSI/IEEE C37.90.1-1989	*
Environmental		
Operating Temp. Range	-40°C to +80°C	*
Storage Temp. Range	-40°C to +80°C	*
Relative Humidity	0 to 95% Noncondensing	*
Emissions	EN50081-1, ISM Group 1, Class A (Radiated, Conducted)	*
Immunity	EN50082-1, ISM Group 1, Class A (ESD, RF, EFT)	*
Mechanical Dimensions (h)(w)(d)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)	*
Mounting	DIN EN 50022 -35x7.5 or -35x15 rail	*

\* Same specification as DSCA30.

NOTES:

(1) Includes nonlinearity, hysteresis and repeatability.

(2) V<sub>Z</sub> is the nominal input voltage that results in 0V or 0mA output.

## ORDERING INFORMATION

MODEL	INPUT RANGE	AVAILABLE OUTPUT RANGE*
DSCA30-01	-10mV to +10mV	1
DSCA30-02	-50mV to +50mV	1
DSCA30-03	-100mV to +100mV	1
DSCA30-04	-10mV to +10mV	2, 3, 4
DSCA30-05	-50mV to +50mV	2, 3, 4
DSCA30-06	-100mV to +100mV	2, 3, 4
DSCA30-07	0 to +10mV	2, 3, 4
DSCA30-08	0 to +50mV	2, 3, 4
DSCA30-09	0 to +100mV	2, 3, 4
DSCA31-01	-1V to +1V	1
DSCA31-02	-5V to +5V	1
DSCA31-03	-10V to +10V	1
DSCA31-04	-1V to +1V	2, 3, 4
DSCA31-05	-5V to +5V	2, 3, 4
DSCA31-06	-10V to +10V	2, 3, 4
DSCA31-07	-20V to +20V	1
DSCA31-08	-20V to +20V	2, 3, 4
DSCA31-09	-40V to +40V	1
DSCA31-10	-40V to +40V	2, 3, 4
DSCA31-11	0 to +1V	2, 3, 4
DSCA31-12	0 to +5V	2, 3, 4
DSCA31-13	0 to +10V	2, 3, 4
DSCA31-14	0 to +20V	2, 3, 4
DSCA31-15	0 to +40V	2, 3, 4

* OUTPUT RANGE	PART NO. SUFFIX	EXAMPLE
1. -10V to +10V	NONE	DSCA30-01
2. 0V to +10V	NONE	DSCA30-04
3. 4 to 20mA	C	DSCA30-04C
4. 0 to 20mA	E	DSCA30-04E