

FPM-3171G

Industrial 17" SXGA Flat Panel Monitor with Direct-VGA Port



Features

- 17" SXGA TFT LCD with resolution up to 1280 x 1024
- Robust design with stainless steel chassis and aluminum front panel
- Hard anodic coating to prevent panel abrasion and acid corrosion
- Anti-reflective screen with tempered glass
- Supports stainless steel front panel (Customization)
- OSD control pad on front panel
- Supports transreflective LCD technology (Customization)
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- NEMA4 / IP65 Compliant
- RoHS Compliant

Introduction

FPM-3171G is a 17-inch color TFT LCD flat panel monitor specifically designed for industrial applications. With a viewing size as large as 17", FPM-3171G presents an ample display area as well as vivid and sharp images for your HMI. FPM-3171G features direct VGA signal transmission. You can thus upgrade the displays without making changes to the existing system. The on-screen display function also makes it easy to adjust the images on the screen. The whole chassis is designed in stainless steel and the front panel is made of aluminum with NEMA4/IP65 compliance.

Specifications

General

- **Button Controls** OSD (Onscreen Display) control pad on front panel
- **Certification** BSMI, CCC, CE, FCC-B
- **Dimension (WxHxD)** 482 x 354.8 x 68 mm (19" x 13.9" x 2.7)
- **Enclosure** Front panel : Aluminum with hard anodic coating,
Rear cover : Stainless steel chassis
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount with optional mounting kit
- **Power Input** External 50 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 4.16 A output
- **Video Port** VGA
- **Weight (Net)** 9.25 kg (20.39 lbs)

LCD Display

- **Display Type** SXGA TFT LCD (CPT)
- **Display Size** 17"
- **Max. Resolution** 1280 x 1024
- **Max. Color** 16.2M
- **Viewing Angle (H, V)°** 140, 130
- **Luminance (cd/m²)** 300
- **Backlight Life (hrs)** 40,000
- **Contrast Ratio** 500 : 1

Touchscreen (Optional)

- **Sensor** ELO
- **Type** 5W Resistive
- **Interface** RS-232
- **Lifespan** 35 million touches at a single point
- **Light Transmission** 80%±5
- **OS support** DOS, Windows 95/98/ME/2000/XP/NT
- **Power Consumption** +5V @ 100 mA
- **Touch Resolution** 4096 x 4096

Environment

- **Operation Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 60° C (-4 ~ 140° F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** IEC529 IP65 (Front Panel)
- **Vibration** 5~500 Hz, 1 Grms (Operating, Random)


Ordering Information

- **FPM-3171GA** Industrial 17" SXGA Flat Panel Monitor
- **FPM-3171G-RA** FPM-3171GA with resistive touchscreen (RS-232 interface)
- **FPM-3171GAE** Industrial 17" SXGA Flat Panel Monitor (RoHS Compliant)
- **FPM-3171G-RAE** FPM-3171GAE with resistive touchscreen (RS-232 interface) (RoHS Compliant)

Dimensions


Unit: mm

Diameters of the rackmount holes:
Vertical: 6.5mm
Horizontal: 9mm

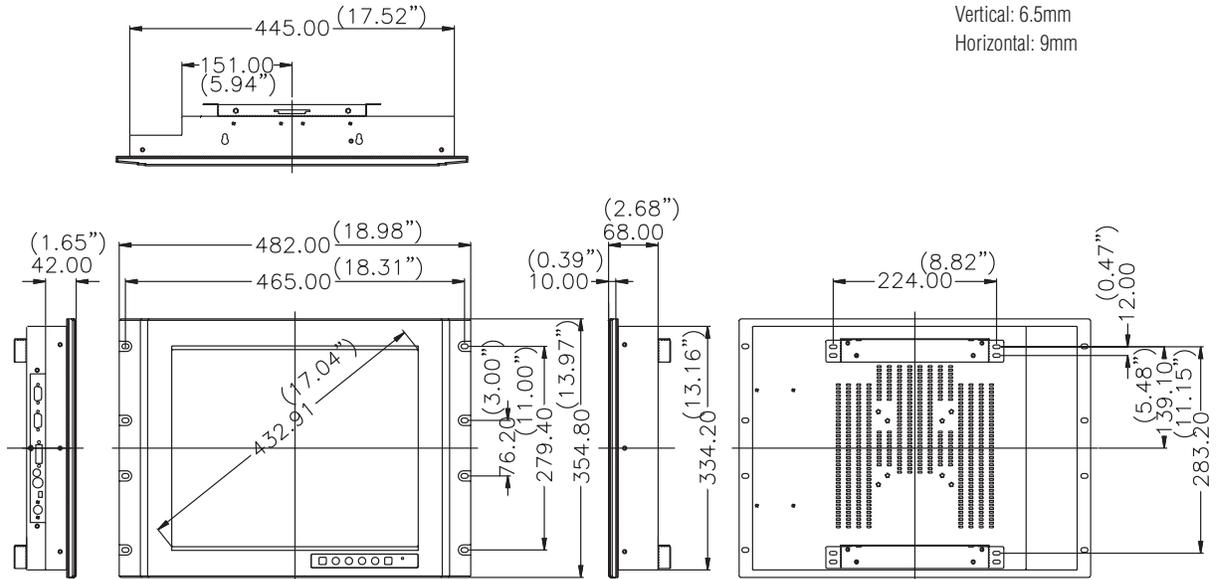

Cut-out dimension: 451 x 340 mm (17.8" x 13.4")

Side View

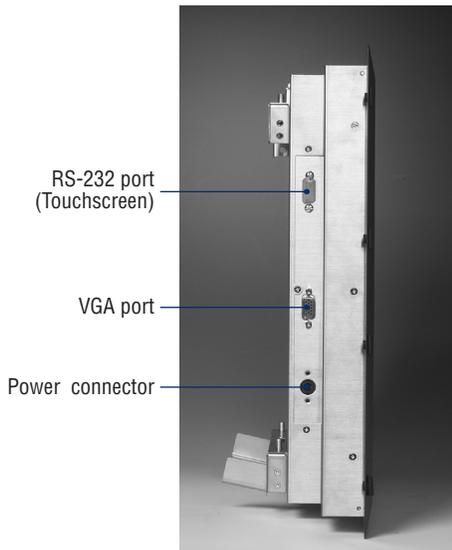

Rear View

