

IPC-7220

Desktop/Wallmount Chassis for ATX Motherboard

NEW




Features

- Desktop/Wall mountable chassis for ATX motherboard
- Supports two front-accessible 5.25" disk drives, one FDD and one internal 3.5" HDD
- Lockable front door prevents from any unauthorized access
- Front accessible USB and PS/2 connectors
- Front LED indicators for fault detection and alarm notification
- Easily-maintained air filters
- Shock-resistant drive bay design
- Bi-directionally mountable on panels or walls with supplied bracket
- Optional redundant power supply



Specifications



		Front-accessible	Internal
Drive Bay	5.25"	2	-
	3.5"	1	1
Cooling	Air Filters	2 (one 7 cm x 12 cm and one 12 cm x 12 cm)	
	Fan	One (85 CFM)	
I/O Interface	USB	2 (Front-accessible)	
	PS/2	PS/2 keyboard and mouse, or PS/2 keyboard depends on the enclosed motherboard	
Miscellaneous	Indicators	PWR, HDD, TEMP and Fan	
	Switches	Power, system reset and alarm reset	
	Rear panel	Reserved two D-SUB 9-pin openings	
Environmental	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating -20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85 % @ 40 °C, non-condensing	10 ~ 95 % @ 40 °C, non-condensing
	Vibration (5 ~ 500MHz)	1 Grms	2G
	Shock	10G (With 11 ms duration, half sine wave)	30G
	Acoustic Noise	Less than 52dB sound pressure at 5 ~ 28 °C (41 ~ 82 °F)	
	Altitude	0 to 3,048 m (0 ~ 10,000 ft)	
Physical Characteristics	Dimensions (W x H x D)	200 x 320 x 480 mm (7.9" x 12.6" x 18.9")	
	Weight	14 kg (30.8 lb)	

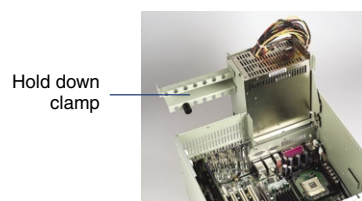

Easy-to-maintain power supply bracket design




Easy-to-replace cooling fan

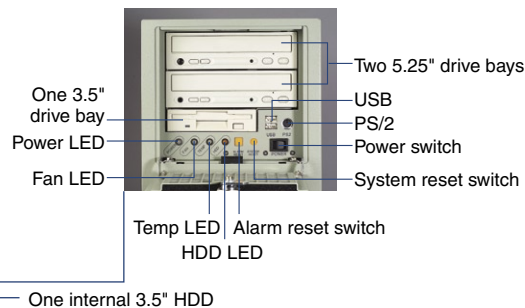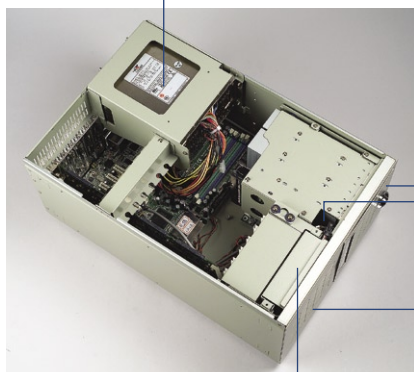

Easy-to-replace fan filter

Dimension Diagram

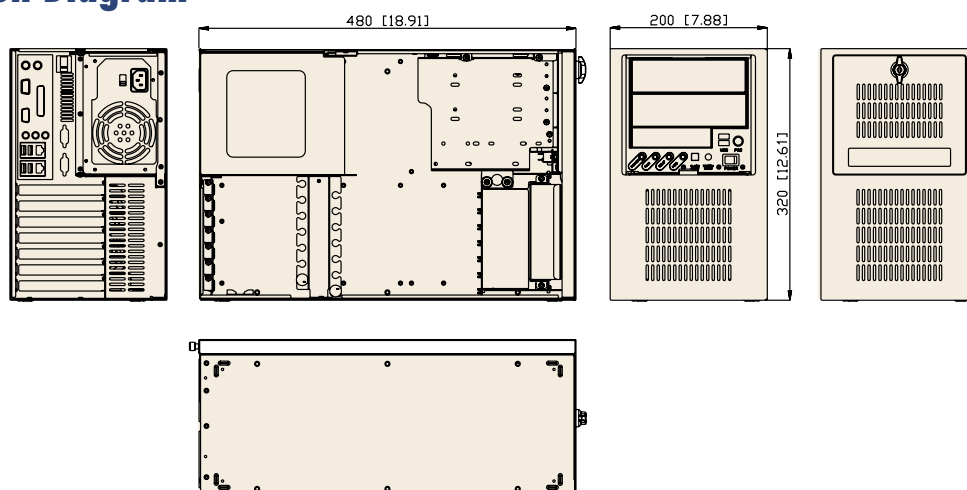

Unit: mm (inch)

Power Supply Options

Part Number	Watt	Input	Output	Specifications		
				Mini-load	Safety	MTBF
PS-300ATX-DC48 (ATX)	300W	DC -48 V	+5 V @ 30 A, +3.3 V @ 28 A +12 V @ 15 A, -12 V @ 0.8 A -5 V @ 0.3 A, +5 Vsb @ 2 A	+5 V @ 0.3 A, +3.3 V @ 0.3 A +12 V @ 0.2 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C
PS-300ATX-ZB (ATX, PFC)	300W	AC 100 ~ 240 V (Full range)	+5 V @ 30 A, +3.3 V @ 28 A +12 V @ 15 A, -12 V @ 0.8 A -5 V @ 0.3 A, +5 Vsb @ 2 A	+5 V @ 0.1 A, +12 V @ 0.3 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C
RPS-300ATX-Z (ATX, PFC)	300W	AC 100 ~ 240 V (Full range)	+5 V @ 25 A, +3.3 V @ 18 A +12 V @ 16 A, -12 V @ 0.5 A -5 V @ 0.5 A, +5 Vsb @ 2 A	+5 V @ 3 A, +3.3 V @ 1 A +12 V @ 2 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C
PS-400ATX-ZB (ATX, PFC)	400W	AC 100 ~ 240 V (Full range)	+5 V @ 35 A, +3.3 V @ 25 A +12 V @ 30 A, -12 V @ 1.0 A -5 V @ 0.8 A, +5 Vsb @ 2 A	+5 V @ 3 A, +3.3 V @ 1 A +12 V @ 2 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	91,000 hrs @ 25° C
RPS-400ATX-Z (ATX, PFC)	400W	AC 100 ~ 240 V (Full range)	+5 V @ 35 A, +3.3 V @ 25 A +12 V @ 28 A, -12 V @ 1.2 A -5 V @ 0.5 A, +5 Vsb @ 2 A	+5 V @ 3 A, +3.3 V @ 1 A +12 V @ 2 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C

Ordering Information

Part Number	Power Supply	Motherboard	Regulation
IPC-7220-00X	Without power supply, with ATX switch	AIMB-740, AIMB-741	-
IPC-7220-30Z	PS-300ATX-ZB	AIMB-742, AIMB-744	UL, cUL, CE
IPC-7220-30R	RPS-300ATX-Z	AIMB-750, AIMB-760	UL, cUL, CE
IPC-7220-40Z	PS-400ATX-ZB		UL, cUL, CE

Optional Accessories

Part Number	Description
1700060202	Y-cable for PS/2 mouse and keyboard
1750000073	2U-high P4 CPU cooler up to 3.2GHz (89 W)
1759200410	Fan 120*120*25.4mm with housing
1990000486	Fan filter in front of fan
1990000488	Fan filter on drive bay door



Optional redundant power supply version

Industrial Motherboards **1**Industrial Motherboard Chassis **2**PICMG Single Board Computers **3**Industrial Computer Chassis **4**Industrial Computer Peripherals **5**6U CompactPCI Enclosures **6**6U CompactPCI Boards **7**6U CompactPCI I/O **8**6U CompactPCI Accessories **9**3U CompactPCI Systems **10**Internet Security Platforms **11**Network Application Ready Platforms **12**