


MIC-3377

6U CompactPCI® Socket 370 Pentium® III/ Celeron® Processor Board with VGA/Dual LAN

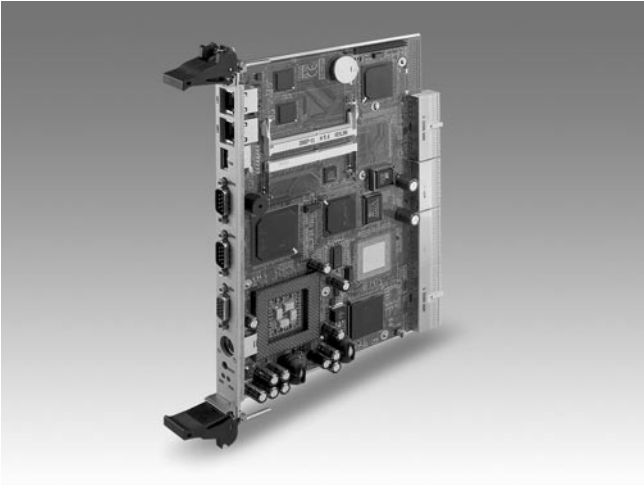

Features


- Socket 370 Intel® Pentium® III/Celeron® processor
- Intel 440BX chipset
- Up to 512 MB SO-DIMM SDRAM memory
- Dual 10/100 Mbps LAN ports
- Fanless heat sink

CE FCC

Introduction

The MIC-3377 is a 6U-high CompactPCI master CPU board that accepts an Intel Pentium III or Celeron processor with 370-pin FC-PGA package. The Pentium III/Celeron processor incorporates a 256 KB/128 KB on-die L2 Cache. The L2 cache implements the new advanced transfer cache architecture with 256-bit wide bus and runs at the full speed of the processor core. The MIC-3377 is well suited for demanding mission-critical CompactPCI applications.

Fanless heat sink with space-saving design

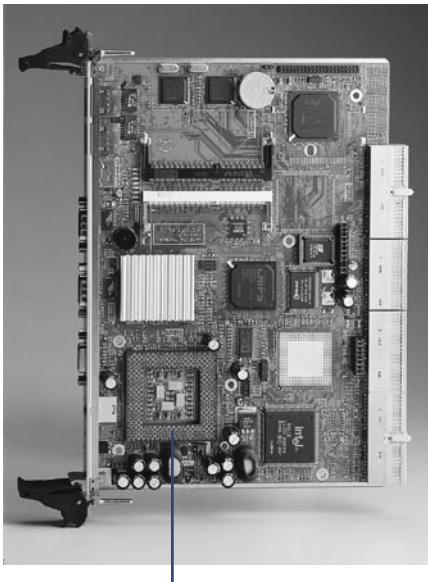


Socket 370 Pentium III/Celeron CPU

Two PCI-to-PCI bridges drive up to 14 bus master PCI slots (MIC-3377D/M) Single PCI-to-PCI bridge drives up to 7 bus master PCI slots



Onboard I/Os on front panel

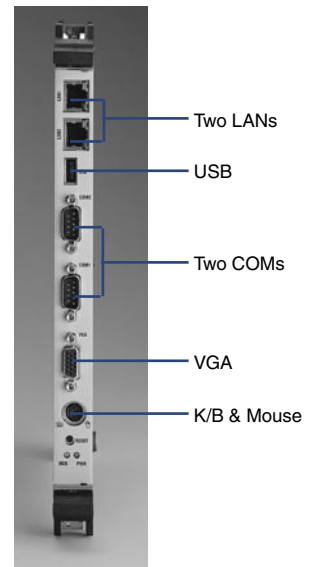

Specifications

Processor System	CPU	Intel Pentium III		Intel Celeron
	Max. Speed	1 GHz (100 MHz FSB)		733 MHz (66 MHz FSB)
	L2 Cache	256 KB		128 KB
	Chipset	Intel 440BX		
Bus	BIOS	Award 2 Mb Flash		
	Front Side Bus	66/100 MHz		
	PCI	32-bit/33 MHz		
Memory	Technology	PC-100 SDRAM with ECC support		
	Max. Capacity	512 MB		
	Socket	144-pin SO-DIMM x2		
Graphic	Controller	69000		
	VRAM	2 MB SDRAM		
Ethernet	Interface	10/100Base-TX		
	Controller	Intel 82559 x2		
	Connector	RJ-45 x2		
EIDE	Mode	ATA 33		
	Channel	2 (Max. 4 devices)		
PCI-to-PCI Bridge	Controller	Intel 21150		
	System Bus	32-bit/33 MHz		
Front I/O Interface	LAN	2		
	USB	1 (USB 1.0 compliant)		
	Serial	2 (RS-232, 16C550 compatible)		
	PS/2	1		
	VGA	1		
Operating System	Compatibility	Windows 2000/NT 4.0/XP, Red Hat Linux 7.0, Sun Solaris 8		
Watchdog Timer	Output	System reset		
	Interval	Programmable, 1 ~ 63 sec.		
Power Requirement	Maximum (Pentium III, 850 MHz)	+3.3 V	+5 V	+12 V
		2.5 A	2.1 A	640 mA
Environment		Operating		Non-Operating
	Temperature	0 ~ 50 °C (32 ~ 122 °F)		-40 ~ 60 °C (-40 ~ 140 °F)
	Humidity	--		95 % @ 60 °C, non-condensing
	Vibration (5-500 Hz)	1.0 Grms		2.0 G
Physical	Dimensions (W x D)	233.35 x 160 mm (9.2" x 6.3"), 1-slot width		
	Weight	0.8 Kg (1.76 lb)		
Compliance	Standard	PICMG® 2.0, R3.0 CompactPCI Specification		

Recommended Configurations

CPU Board	PMC Module	Rear I/O Board	Enclosure
MIC-3377M	--	RIO-3301-A, RIO-3302-A, RIO-3302S-A	MIC-3037, MIC-3039, MIC-3036, MIC-3056, MIC-3041A, MIC-3038A/B, MIC-3081
MIC-3377D/M	--	RIO-3301-A	MIC-3031

Rear Transition Board

Part Number	Rear Panel I/O						On-board Header								Slot Width
	Keyboard	Mouse	COM	USB	LAN	VGA	COM	SCSI	IDE**		FDD	CF	Socket	2.5" HDD Carrier	
									40-pin	44-pin					
RIO-3301-A	1	1	1	--	--	--	1	--	2	1	1	1		Optional	1
RIO-3302-A	1	1	2	1	2	1	--	--	2	1	1	1		Optional	1
RIO-3302S-A	1	1	2	1	2	1	--	1*	2	1	1	1		Optional	1

* SCSI chipset (Adaptec 7892) on board.

** The 40-pin and 44-pin connectors share the same channel; user can only use one of these two connectors.

Ordering Information

Part Number	LAN	VGA	COM	USB	PCI-to-PCI Bridge	Slot Width
MIC-3377/M-A	2	1	2	1	1	1
MIC-3377D/M-A*	2	1	2	1	2	1

* MIC-3377D only can be used with RIO-3301 in MIC-3031/14-12R enclosure