


PCI-1761

8-ch Relay Actuator and 8-ch Isolated Digital Input Card

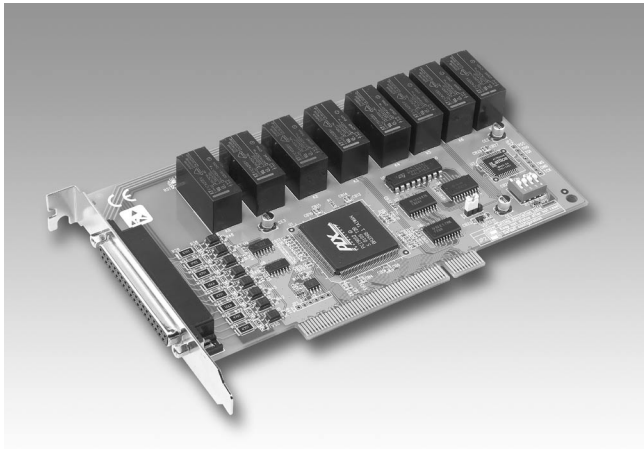

CE

Features

- 8 relay output channels and 8 isolated digital input channels
- LED indicators to show activated relays
- 4 Form C and 4 Form A type relay output channels
- Output status read-back
- Retained relay output values when hot system reset
- High-voltage isolation on input channels (3,750 V_{DC})
- High ESD protection (2,000 V_{DC})
- High over-voltage protection (70 V_{DC})
- Wide input range (10 ~ 50 V_{DC})
- Interrupt handling capability
- Board ID

Introduction

The PCI-1761 relay actuator and isolated D/I card is an add-on card for the PCI bus. It provides 8 optically-isolated digital inputs with isolation protection of 3,750 V_{DC} for collecting digital inputs in noisy environments and 8 relay actuators for serving as on/off control devices or small power switches. For easy monitoring, each relay is equipped with one red LED to show its on/off status. The PCI-1761's eight optically-isolated digital input channels are ideal for digital input in noisy environments or with floating potentials.

Rugged Protection

The PCI-1761 digital input channels feature a rugged isolation protection for industrial, lab and machinery automation applications. It durably withstands voltage up to 3,750 V_{DC}, protecting your host system from any incidental harms. If connected to an external input source with surge-protection, the PCI-1761 can offer up to a maximum of 2,000 V_{DC} ESD (Electrostatic Discharge) protection. Even with an input voltage rising up to 70 V_{DC}, the PCI-1761 can still manage to work properly, albeit for only a short period of time.

Reset Protection Fulfills Requirement for Industrial Applications

When the system has undergone a hot reset (i.e. without turning off the system power), the PCI-1761 can either retain output values of each channel, or return to its default configuration as open status, depending on its onboard jumper setting. This function protects the system from unwanted operations during unexp

Specifications

Isolated Digital Input

- Channels 8
- Optical Isolation 3,750 V_{DC}
- Opto-isolator ResponseTime 25 ms
- Over-voltage Protect 70 V_{DC}
- Input Voltage 10 ~ 50 V_{DC}
- Input Current 1.6 mA @ 10 V_{DC}
8.9 mA @ 50 V_{DC}

Relay Output

- Channels 8
- Relay Type SPDT (4 Form C and 4 Form A)
- Rating (resistive) 3 A @ 250 V_{AC} or 3 A @ 24 V_{DC}
- Max. Switching Power 750 AV, 72 W
- Max. Switching Load 10 mA @ 5 V_{DC}
- Insulation Resistance 1,000 MΩ min. (at 500 V_{DC})
- Operate Time 15 ms max.
- Release Time 5 ms max.

General

- Connector One 37-pin D-type connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption +5 V @ 220 mA (typical)
+5 V @ 750 mA (max.)
- Operating Temperature 0 ~ 60° C (32 ~ 140° F) (refer to IEC 68-2-1, 2)
- Storage Temperature -20 ~ 70° C (-4 ~ 158° F)
- Operating Humidity 5 ~ 95 % RH non-condensing (refer to IEC 68-2-3)

Ordering Information

- PCI-1761 8-ch Relay Actuator and 8-ch Isolated D/I Card
- PCL-10137-1 DB-37 cable assembly, 1 m
- PCL-10137-2 DB-37 cable assembly, 2 m
- PCL-10137-3 DB-37 cable assembly, 3 m
- ADAM-3937 DB-37 Wiring Terminal for Din-rail Mounting
- PCLD-880 Universal screw terminal board