


# PCI-1763UP

## Low-profile 8-ch Relay/Isolated DI Card

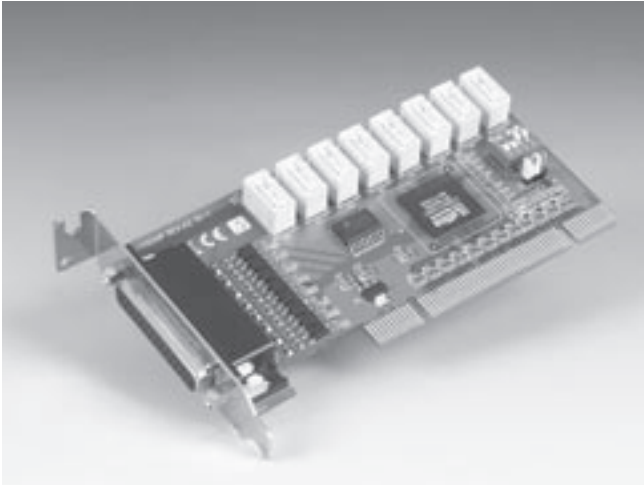

### Features

- 8 relay output channels and 8 isolated digital input channels
- LED indicators to show activated relays
- 8 Form C type relay output channels
- Output status read-back
- Retained relay output values when hot system reset
- High-voltage isolation on input channels (2,500 V<sub>DC</sub>)
- High ESD protection (2,000 V<sub>DC</sub>)
- High over-voltage protection (70 V<sub>DC</sub>)
- Wide input range (10 ~ 50 V<sub>DC</sub>)
- Interrupt handling capability
- Support Universal PCI Bus
- Low Profile PCI card
- BoardID™ switch

### Introduction

PCI-1763UP relay actuator and isolated digital input card is an add-on card for the PCI bus. It provides 8 optically-isolated digital inputs with isolation protection of 2500 V<sub>DC</sub> for collecting digital inputs in noisy environments, and 8 relay actuators for serving as on/off control devices or small power switches. For easy monitoring, each relay is equipped with one red LED to show its on/off status. PCI-1763UP's eight optically-isolated digital input channels are ideal for digital input in noisy environments or with floating potentials. The low profile PCI form factor and universal PCI connector (V2.2 compliant), meet requirements for size and reduced power consumption.

### Specifications

#### Isolated Digital Input

- Channels 8
- Input Voltage Logic 0: 3 V max.  
Logic 1: 10 V min. (50 V max.)
- Input Current 3.16 mA @ 10 V<sub>DC</sub>  
17.3 mA @ 50 V<sub>DC</sub>
- Interrupt Capable Ch. 8
- Isolation Protection 2,500 V<sub>DC</sub>
- Overvoltage Protection 70 V<sub>DC</sub>
- Opto-isolator Response 25 µs
- Input Resistance 2.8 KΩ

#### Relay Output

- Channels 8
- Relay Type DPDT, Form C
- Contact Rating 240 V<sub>AC</sub> @ 0.25 A, or 30 V<sub>DC</sub> @ 1 A
- Relay on Time 5 ms max.
- Relay off Time 4 ms max.
- Life Span 1 x 10<sup>7</sup> @ 6 V/100 mA
- Resistance Contact: < 50 mΩ  
Insulation: 1 GΩ min. (at 500 V<sub>DC</sub>)

#### General

- I/O Connector Type DB44 female
- Dimensions 119.91 x 64.41 mm (Low-Profile MD1)
- Power Consumption +5V @ 107.5 mA (typical)  
+5V @ 301.3 mA (max.)
- Operating Temperature 0 ~ 60° C (32 ~ 140° F) (refer to IEC 68-2-1,2)
- Storing Temperature -20 ~ 70° C (-4 ~ 158° F)
- Storing Humidity 5 ~ 95 % RH, non-condensing (refer to IEC 68-2-3)

### Ordering Information

- **PCI-1763UP** Low-profile 8-ch Relay/Isolated DI Card
- **PCL-10144-1** DB 44-pin cable, 1 m
- **ADAM-3944** DB-44 Wiring Terminal for DIN-rail mounting

### Pin Assignments

