

Tinytag Ultra 2 Temperature/Relative Humidity Logger (-25 to +85°C/0 to 95% RH)

TGU-4500

Issue 10
17th October 2014
E&OE

Tinytag Ultra 2 data loggers are ideally suited to monitor interior applications where there is little or no moisture.

Tinytag Ultra 2 data loggers have a high reading accuracy and resolution, large memories, a fast offload speed and a low battery monitor.

The TGU-4500 is a self contained temperature and humidity recorder.




Popular Applications

- Office and housing monitoring
- Pharmaceutical manufacture
- Dry food storage
- Museum display and repository
- Incubators



Features

- Temperature and relative humidity recorder
- 32,000 reading capacity
- High accuracy
- High reading resolution
- Fast data offload
- Splash-proof case
- Low battery monitor
- User-replaceable battery






Features

| | |
|-------------------------------|----------------------------------------------------------------|
| Total Reading Capacity | 32,000 readings |
| Memory type | Non Volatile |
| Trigger Start | Magnetic Switch (from SN 602211) |
| Delayed Start | Relative / Absolute (up to 45 days) |
| Stop Options | When full After n Readings Never (overwrite oldest data) |
| Reading Types | Actual, Min, Max |
| Logging Interval | 1 sec to 10 days |
| Offload | While stopped or when logging in minutes mode |
| Alarms | 2 fully programmable; latching |

Reading Specification

Temperature

| | |
|---------------------------|--------------------------------------------|
| Reading Range | -25°C to +85°C (-13°F to +185°F) |
| Sensor Type | 10K NTC Thermistor (Internally mounted) |
| Response Time | 20 mins to 90% FSD in moving air |
| Reading Resolution | 0.01°C or better |
| Accuracy | |

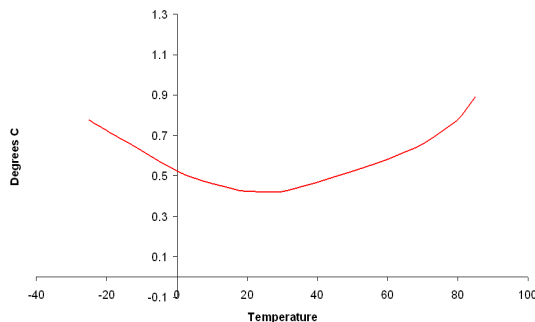


Relative Humidity

| | |
|---------------------------|-------------------------|
| Reading Range | 0% to 95% RH |
| Sensor Type | Capacitive |
| Accuracy | ±3.0% RH at 25°C / 77°F |
| Reading Resolution | Better than 0.3% RH |
| Sensor Location | Externally mounted |
| Response Time | 10 seconds to 90% FSD |

RH Sensor Working Range

The working range for the RH sensor is shown in terms of relative humidity / temperature limits.



Physical Specification

| | |
|---------------------------|----------------------------------|
| IP Rating | IP53 splash proof (see notes) |
| Operational Range* | -40°C to +85°C (-40°F to +185°F) |
| Case Dimensions | |
| Height | 72mm / 2.83" |
| Width | 60mm / 2.36" |
| Depth | 33mm / 1.30" |
| Weight | 55g / 1.94oz |

*The Operational Range indicates the physical limits to which the unit can be exposed, not the reading range over which it will record.

Notes

Battery Type SAFT LS14250 or LST14250; Tekcell SBAA02P

The logger will operate with other 1/2AA 3.6V Lithium (Li-SOCl₂) batteries but performance cannot be guaranteed.

Replacement Interval Annually

Before replacing the battery the data logger must be stopped.

When replacing the battery, wait at least one minute after removing the old battery before fitting the new one.

Data stored on the logger will be retained after a battery is replaced.

If used at low temperatures the data logger should be allowed to warm to room temperature before it is opened to avoid condensation forming inside the unit.

The IP53 rating is valid only when the unit's connector cap is fitted and the unit is orientated with its hanging tab uppermost.

If moisture forms on the unit's RH sensor readings will become unpredictable. Once the sensor has dried out, and provided no residue is left behind, the unit should return to normal reading within 30 minutes.

Any dust or residue that is allowed to build up on the RH sensor will affect the unit's reading accuracy.

The sensor may be cleaned with de-ionised water or pure isopropanol, but not with abrasive detergents, as scratches or residue will affect the accuracy.

The RH sensor will resist small amounts of the following chemicals: formaldehyde, ammonia, carbon monoxide, sulphur dioxide, ethylene oxide, hydrogen chloride, hydrogen fluoride, hydrogen peroxide, nitrogen dioxide, methyl chloride, chlorine, freon, methanol, ethanol, isopropanol and ozone. It also offers resistance to ultraviolet rays.

Salt solutions may cause permanent damage as crystals forming within the porous layers affect moisture levels there.

Trigger Start

The trigger start option allows a unit to be set up as required and then started at a later time with a magnet. The position of the unit's trigger start switch is indicated by the ••• label on the back of the logger. When the "Wait until trigger event" option is selected in the Tinytag Explorer software, the green LED on the unit will flash once every eight seconds, indicating that the unit is waiting to log. When a magnet passed over the label, the green LED will light briefly to indicate that the unit has been activated. Once activated, the green LED will flash every four seconds to indicate that the logger is recording.



Calibration

This unit is configured to meet Gemini's quoted accuracy specification during its manufacture.

We recommend that the relative humidity channel should be checked once every six months, and the temperature channel annually, against a calibrated reference meter.

A certificate of calibration, traceable to a national standard, can be supplied for an additional charge either at the point of purchase, or if the unit is returned for a service calibration.

Approvals

Gemini Data Loggers (UK) Ltd. operates a Business Management System which conforms to ISO 9001 and ISO 14001.



Required and Related Products

The following piece of software:

SWCD-0040: Tinytag Explorer software

and a

CAB-0007-USB: Tinytag Ultra/Plus/View USB Download Cable

The SWCD-0040 software and CAB-0007-USB cable can be ordered together in a pack using the part number SWPK-7-USB.

Further Related Products

SER-9500: Tinytag Data Logger Service Kit

ACS-6000: Trigger Start Magnet