TPC-1550H

15" XGA TFT LCD Intel® Atom™ **Thin Client Computer**



Features

- Intel® Atom™ N270 1.6 GHz processor on board
- 15" XGA TFT LCD
- Fanless cooling system
- NEMA4/IP65 compliant front panel
- Supports Microsoft® Windows XP/XPe/CE
- Windows CE 5.0/6.0 with Java Script ready
- Supports Linux OS with Firefox and Java Script plugins
- Gigabit Ethernet supported
- Energy Star approval





Introduction

With a high quality TPC product line, TPC extends its Touch Panel Computer family with Intel® Atom™ platform for 5.7", 12.1" & 15". TPC-1550H is designed with Intel® Atom™ 1.6 GHz processor as its core. The Intel Atom has low power consumption and 1.6 GHz operating frequency. This system is fanless, slim design for Web-based terminal solutions, so JavaScript is included in the Windows operating system. For Linux systems, we provide Mozilla Firefox.

Specifications

General

BIOS Award® 4 MB

 Certifications BSMI, CCC, CE, FCC, UL

 Cooling System Fanless design

Dimensions (W x H x D) 383 x 307 x 58.1 mm (15.08" x 12.09" x 2.29")

Enclosure Front bezel: Die-cast Aluminum alloy

Back housing: SECC

Mounting Desktop, Wall or Panel Mount

 OS Support Windows XP/XPe

Windows CE 5.0/6.0 with Java Script

Linux with Firefox explorer and Java Script plugin

 Power Consumption 40 W (typical) 18 ~ 28 V_{DC} Power Input Watchdog Timer 1 ~ 255 sec (system) Weight (Net) 3 kg (5.51 lb)

System Hardware

- CPU Intel Atom 1.6 GHz Intel 945GSE + ICH7M Chipset

1GB SO-DIMM DDR2 533 SDRAM Memory

Up to 2GB (One channel)

LAN 10/100/1000Base-T x 1 Storage CompactFlash® slot x 1 I/O RS-232 x 2 (COM1, 2)

USB 2.0 x 2 (Host) PS/2 x 1

LCD Display

Display Type XGA TFT LCD Display Size Max. Resolution 1024 x 768

Max. Colors 262 K Luminance cd/m² 400 Viewing Angle (H/V°) 160/140 **Backlight Life** 50,000 hrs Contrast Ratio 700:1

Touchscreen

Lifespan 1 million touches at single point


 Light Transmission Above 75% Resolution Linearity

Type 5-wire, analog resistive

Environment

- Humidity 10 ~ 95% RH @ 40° C. non-condensing

 Ingress Protection Front panel: NEMA4, IP65 • Operating Temperature $0 \sim 45^{\circ} \text{ C} (32 \sim 113^{\circ} \text{ F})$ Storage Temperature -20 ~ 60° C (-4 ~ 140° F) Vibration Protection 2 Grms (5 ~ 500 Hz) (Operating, random vibration)

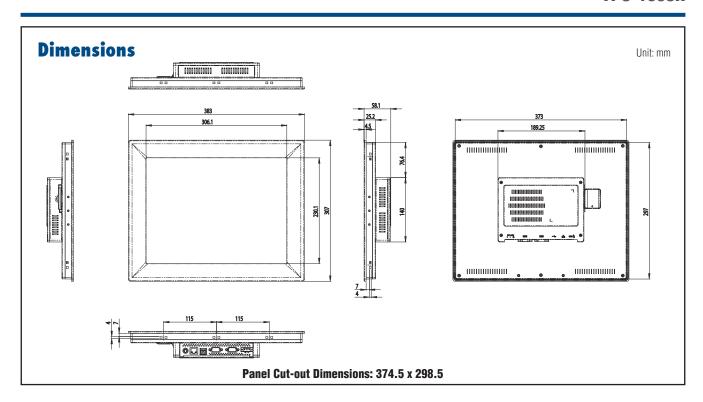

Ordering Information


■ TPC-1550H-N2AE

15" XGA Touch Panel PC, Atom N270 1.6 GHz,1 GB

PWR-247-AE

24 V 50 W AC-DC Power Adapter

Rear View

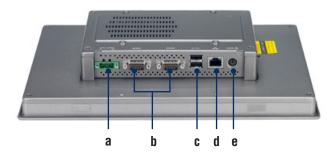

- a. Power Receptor
- b. COM (RS-232)
- c. USB 2.0

- d. LAN (10/100/1000)
- e. PS/2