

TPC-1070H

TPC-870H

10.4" SVGA TFT LCD Pentium® M/
Celeron® M Touch Panel Computer

8" VGA TFT LCD Celeron® M Touch
Panel Computer

NEW



Features

- Intel® Pentium® M Processor up to 1.4 GHz on board
- 10.4" SVGA TFT LCD
- Compact design with Die-Casting
- Fanless cooling system
- NEMA4/IP65 compliant front panel
- Supports Microsoft® Windows XP/CE and WinXPe
- Downward I/O cabling
- Automatic data flow control RS-485
- Dual fast Ethernet supported

Introduction

With a high quality TFT LCD display, TPC-1070H/870H is designed with the Intel Pentium M 1.4 GHz/Celeron® M 1 GHz processor as its core. The Intel Pentium M/Celeron M has low power consumption and 1.4 GHz/1 GHz operating frequency. This system is fanless although the kernel is powerful. In addition, spindle-free storage makes the TPC-1070H/870H a durable and reliable platform. For applications where spindle-free storage is not critical, a fast-access HDD module can be used. The rich I/O portfolio meets diverse requests.

Specifications

General

- **BIOS** Award® 4 MB
- **Certifications** BSMI, CCC, CE, FCC, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 286 x 226 x 58 mm (11.26" x 8.9" x 2.28")
- **Enclosure** Die-Casting Aluminum alloy
- **Mounting** Desktop, Wall or Panel Mount
- **OS Support** Windows XP/CE and WinXPe
- **Power Consumption** TPC-1070H: 41 W (typical)
TPC-870H: 33 W (typical)
- **Power Input** 18 ~ 32 V_{DC}
- **Watchdog Timer** 1 sec (system)
- **Weight (Net)** 3.5 kg (7.72 lbs)

System Hardware

- **CPU** TPC-1070H: Intel Pentium M 1.4 GHz/Celeron M 1 GHz
TPC-870H: Intel Celeron M 1 GHz
- **Expansion Slots** 1 x CompactFlash slot
1 x PCI-104 slot
- **Graphics Controller** Intel 855 GME
- **Keyboard/Mouse Ports** 1 x PS/2
- **LAN** 1 x 10/100Base-T, 1 x 10/100/1000Base-T (TPC-1070H-P1E)
2 x 10/100Base-T (TPC-1070H-C1E/870H-C1E)
- **Memory** 512 MB DDR SDRAM
- **Serial Ports** 2 x RS-232 and 1 x RS-232/485/422
- **Storage** 1 x 2.5" PATA HDD (optional)
- **USB Ports** 2 x USB 2.0

LCD Display


- | | TPC-1070H | TPC-870H |
|-------------------------------------|--------------|-------------|
| ▪ Display Type | SVGA TFT LCD | VGA TFT LCD |
| ▪ Display Size | 10.4" | 8" |
| ▪ Max. Resolution | 800 x 600 | 640 x 480 |
| ▪ Max. Colors | 260 K | 64 K |
| ▪ Luminance cd/m² | 400 | 350 |
| ▪ Viewing Angle (H/V°) | 140/110 | 130/120 |
| ▪ Backlight Life | 50,000 hrs | 50,000 hrs |
| ▪ Contrast Ratio | 500 : 1 | 250 : 1 |

Touchscreen

- **Lifespan** 1 million touches at single point
- **Light Transmission** Above 75%
- **Resolution** Linearity
- **Type** 8-wire, analog resistive

Environment

- **Humidity** 10 ~ 95% RH @ 40° C, non-condensing
- **Ingress Protection** Front panel: NEMA4, IP65
- **Operating Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 60° C (-4 ~ 140° F)
- **Vibration Protection** With HDD: 1 grms (5 ~ 500 Hz) (Operating, random vibration)

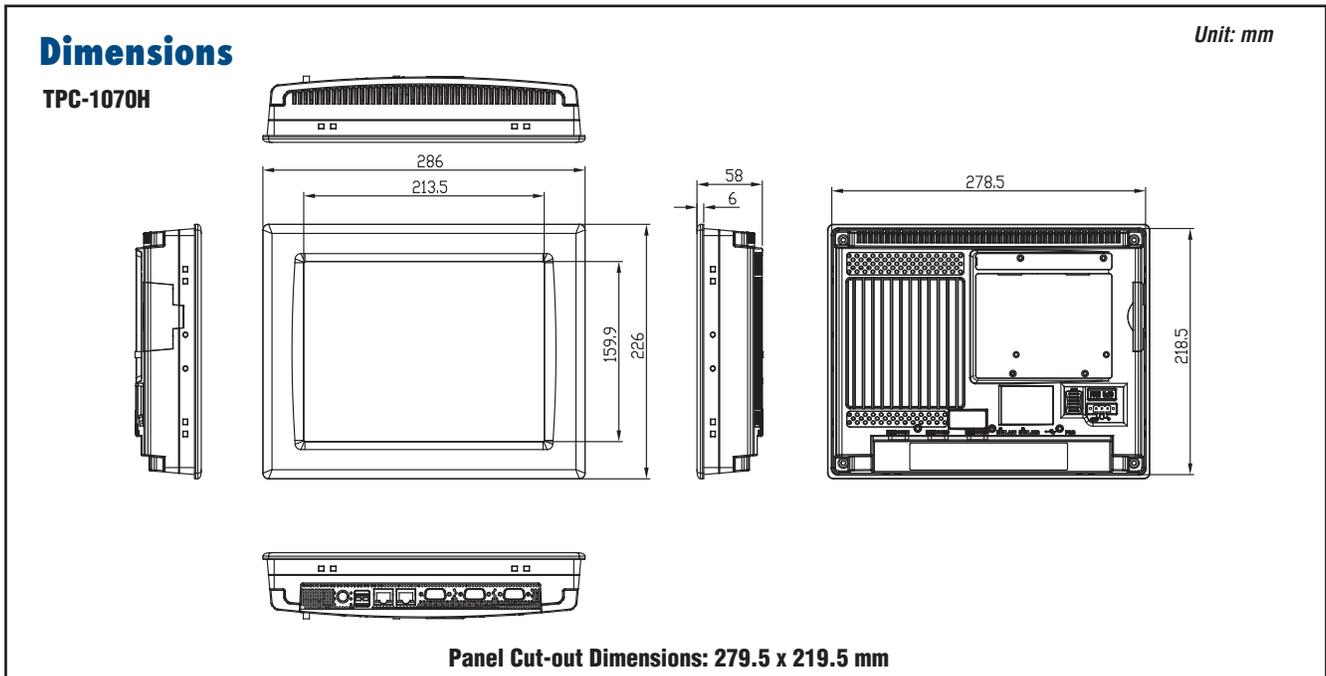


Notes: TPC-870H features same dimension with 8.4" LCD panel

Ordering Information

- **TPC-1070H-P1E** 10.4" SVGA TFT LCD with Intel Pentium M 1.4 GHz CPU, 512 MB DDR SDRAM
- **TPC-1070H-C1E** 10.4" SVGA TFT LCD with Intel Celeron M 1 GHz CPU, 512 MB DDR SDRAM
- **TPC-870H-C1E** 8" VGA TFT LCD with Intel Celeron M 1 GHz CPU, 512 MB DDR SDRAM
- **TPC-1070H-SMKE** TPC-1070H/870H Desktop Stand
- **TPC-1070H-WMKE** TPC-1070H/870H Wallmount Kit
- **TPC-1270H-EPKE** TPC Series PC/PCI-104 Extension Kit
- **PWR-247-AE** 24 V 50 W AC-DC Power Adapter

Rear View

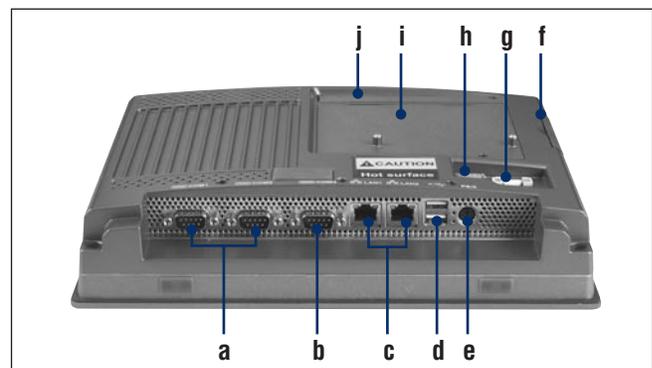

- | | |
|-------------------------|---------------------------------|
| a. COM (RS-232) | f. CompactFlash |
| b. COM (RS-232/422/485) | g. Fuse (3.15A) |
| c. LAN (10/100,1G) | h. Power Switch, Power Receptor |
| d. USB 2.0 | i. HDD Cover |
| e. PS/2 | j. PCI-104 |