

Tinytag Connection Cables, Inductive Pad and Connectors.

ACS-3030, ACS-9700, ACS-9701, ACS-9703, ACS-9750,
CAB-0005, CAB-0005-USB, CAB-0007, CAB-0007-USB, CAB-0725,
CAB-3239, CAB-3246, CAB-3233.

Issue 9
23rd March 2012
E&OE



Tinytag USB Download Cables

CAB-0005-USB Tinytag Transit/Talk USB Download Cable



For Use With	TG-0050 and all Tinytag Talk 2 data loggers
PC Connection	USB Port
Cable Length	1m
Weight	60g

Notes

Supported operating systems are Windows 2000, XP and Vista.

A CD containing device drivers and a quick start guide are supplied with the cable.

CAB-0007-USB Tinytag Ultra/Plus/View USB Download Cable



For Use With	All Tinytag Ultra, Plus and View data loggers.
PC Connection	USB Port
Cable Length	1m
Weight	60g

Notes

Supported operating systems are Windows 2000, XP and Vista.

A CD containing device drivers and a quick start guide are supplied with the cable.

Tinytag Serial Download Cables

CAB-0005 Tinytag Transit/Talk Serial Download Cable



For Use With	TG-0050 and all Tinytag Talk 2 data loggers
PC Connection	9-way Serial Port
Cable Length	1m
Weight	60g

CAB-0007 Tinytag Ultra/Plus/View Serial Download Cable



For Use With	All Tinytag Ultra, Plus and View data loggers.
PC Connection	9-way Serial Port
Cable Length	1m
Weight	60g

CAB-0725 CAB-0007 to CAB-0005 Adaptor



Plugs into a CAB-0007 or CAB-0007-USB cable to allow a connection to a TG-0050 Tinytag Transit or any Tinytag Talk 2 data logger.

For Use With A CAB-0007 or CAB-0007-USB, the TG-0050 Tinytag Transit and all Tinytag Talk 2 and data loggers.

Cable Length 0.2m
Weight 12g

ACS-3030 USB Inductive Pad



For Use With All Inductive Loggers

PC Connection USB Port

Cable Length 1m
Weight 170g

Notes

Supported operating systems are Windows 2000, XP and Vista.

A CD containing device drivers and a quick start guide are supplied with the pad.

Tinytag Input Plugs

ACS-9700 2 Pin Plug



For Use With TGPR-0804, TGPR-1001 and TGPR-1201

Weight 15g

Connection Information

Plug Pin No.	Function
A	Common/0V
B	Signal Input

ACS-9701 3 Pin Plug



For Use With All Tinytag Ultra*, Plus and View data loggers.

Weight 15g

Connection Information

Plug Pin No.	Function
A	RX (logger)
B	TX (logger)
C	Ground

ACS-9703 5 Pin Plug




For Use With TGP-4104, TGP-4204, TV-4104, TV-4204, TGPR-0704, TGPR-0705, TGPR-0805, TGPR-1002,

Weight 15g

Connection Information for TGPR data loggers

Plug Pin No.	Function
A	2.5V Reference
B	12V (NOT TGPR-0704)
C	Sense Line (TGPR-0704)
D	Common/0V
E	Signal Input

ACS-9750 K Type Thermocouple Plug

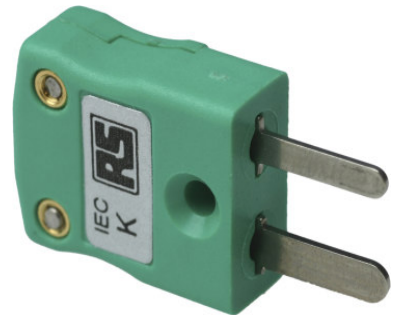

For Use With TGI-3250

Weight 5g

*To use with the Tinytag Ultra, remove the threaded retaining ring.

Tinytag/Talk Input Leads

CAB-3239 Tinytag Voltage/XP Input Lead



For Use With TGPR-0704, TGPR-0705, TGPR-0805 & TGPR-1002

Cable Length 1m
Weight 50g

Connection Information

Plug Pin No.	Colour	Function
A	Red	2.5V Reference
B	Green	12V (NOT TGPR-0704)
C	White	Sense Line (TGPR-0704)
D	Black	Common/0V
E	Yellow	Signal Input

CAB-3246 Tinytag Current, Millivolt, Count Input Lead



For Use With TGPR-0804, TGPR-1001 and TGPR-1201

Cable Length 1m
Weight 30g

Connection Information

Plug Pin No.	Colour	Function
A	Blue	Common/0V
B	Red	Signal Input

CAB-3233 Talk Voltage/Current Input Lead



For Use With TK-4702, TK-4703, TK-4802

Cable Length 1.5m
Weight 27g

Connection Information

Jack Plug	Colour	Function
Tip	White	Sense Line
Ring	Yellow	Signal Input
Shank	Black	Common/0V

Approvals

Gemini Data Loggers (UK) Ltd. operates Quality and Environmental Management Systems which conform to ISO 9001 and ISO 14001. The scope of these systems covers the design, manufacture and servicing of data logging and associated equipment, including software.

