
Gemini Data Sheet

Tinytag Plus Re-ed Millivolt for OEMs TGPR-1000

Issue 2: 1st July 1999 E&OE

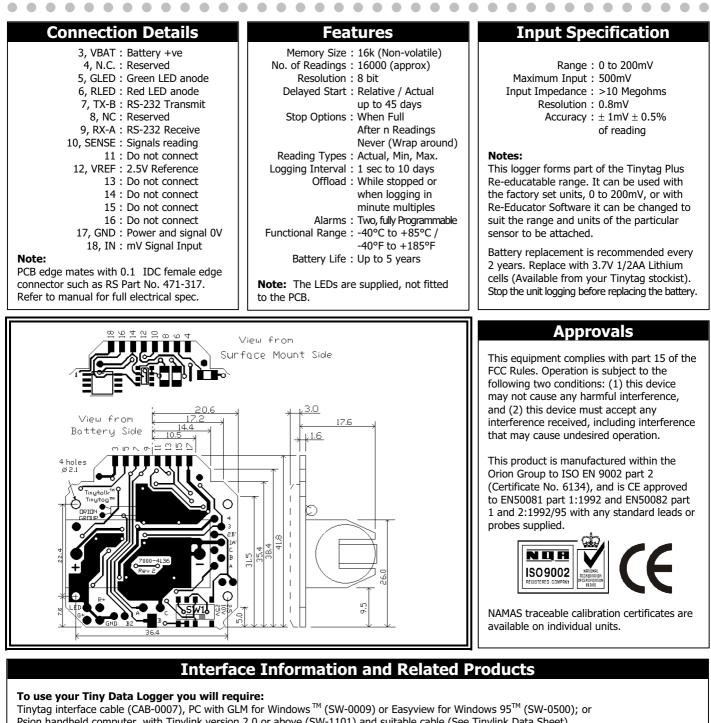

Psion handheld computer, with Tinylink version 2.0 or above (SW-1101) and suitable cable (See Tinylink Data Sheet).

To change ranges and/or units you will need a PC, with Re-Educator Software V2.2 or above (SW-0506) and interface cable.

Further Related Products:

TGPR-0700 TGPR-0800

Tinytag Plus Re-ed Volt: 0 to 2.5V/10V/25V logger, PCB only, for OEM use.
 Tinytag Plus Re-ed Current: 0 to 20 mA logger, PCB only, for OEM use.

Applications

OEM use in a wide range of special logging applications including:

Position sensing C

Custom transducers

Power monitoring

Dr. Schetter BMC IGmbH Boschstr. 12 82178 Puchheim

 Telefon
 089 - 800 6940

 Fax
 089 - 800 69429

 eMail
 mailto:info@bmc.de

