

# ACP-1010/1320

1U Rackmount Chassis for Full-Size SHB/SBC or ATX/MicroATX Motherboard with Dual SAS/SATA HDD Trays

**NEW**

PICMG 1.0

PICMG 1.3



## Features

- Space-saving 1U rackmount chassis, ideal building block for business expansion
- Supports full-size SHB/SBC or ATX/MicroATX motherboards
- LED indicators for LAN connectivity, alarm notification of power supply, HDD activity, system fan, and in-chassis temperature
- ACP-1010: Supports a slim ODD and two 3.5" disk drives
- ACP-1320: supports dual mobile SAS / SATA HDD trays
- Supports up to 2 expansion slots in BP version, and 1 expansion slot via riser card in MB version
- Supports both 250 W/300 W ATX/PFC power supply
- Efficient cooling design prevents the system from over-heating

RoHS COMPLIANT  
FCC CE


## Specifications

		Front-accessible	Internal
Drive Bay	Slim Optical Disk Drive 3.5"	1 1/2 SAS/SATA HDDs	- 1 (For ACP-1010BP-30ZE, it only allows 2.5" HDD.)
Cooling	Fan	BP: 4 (4 cm/24 CFM x 3 + 15 CFM x 1) MB: 2 (4 cm/24 CFM each)	
Front I/O Interface	USB	2	
Miscellaneous	Notification LEDs	System: Power, HDD, Temperature, Fan, LAN1 and LAN2	
	Control	Power switch, system reset & alarm reset button	
	Rear panel	One 9-pin D-SUB opening	
Environment	Temperature	Operating 0 ~ 40° C (32 ~ 104° F)	Non-Operating -20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85% @ 40° C, non-condensing	10 ~ 95% @ 40° C, non-condensing
	Vibration (5 ~ 500 Hz)	0.5G rms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	30 G
	Physical Characteristics	Dimensions (W x H x D)	480 x 44 x 497 mm (19" x 1.7" x 19.6") / 480 x 44 x 617 mm (19" x 1.7" x 24.3")
	Weight	8 kg (17.6 lb) / 8.8 kg (19.4 lb)	


\* This chassis supports up to Intel® Pentium® 4 84W, Core™2 Duo and Core™2 Quad 95W processors. We suggest that the ACP-1010 should be operated under 35° C if it adopts Core™2 Quad processor. For server grade CPU cards like the PCE-7214 configured with SAS RAID card and SAS HDD, we suggest utilizing the Xeon® processor at 35 watts or under for better thermal dissipation. This is due to the thermal and the power consumption of the SAS HDD being much higher than the SATA HDD while the system is operating. When you purchase the ACP-1010BP-30ZE, the internal HDD only can be installed 2.5" instead of 3.5".

## Front View

### ACP-1010

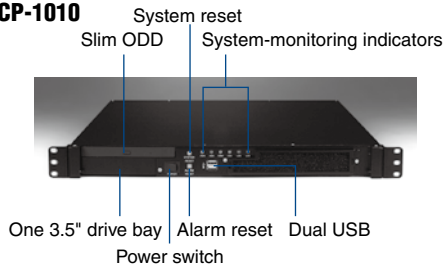



## Inside View

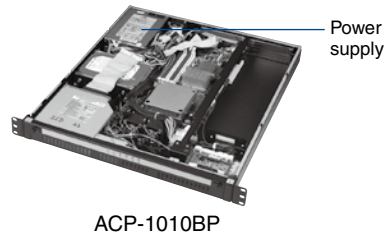

## Rear View




### ACP-1320

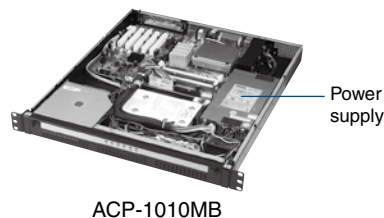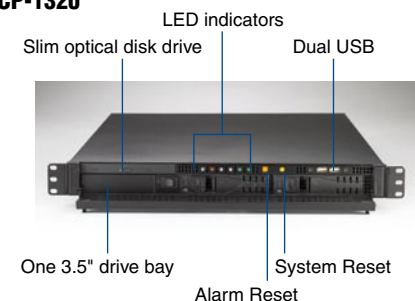


## Dimensions

Unit: mm [inch]


### ACP-1010BP

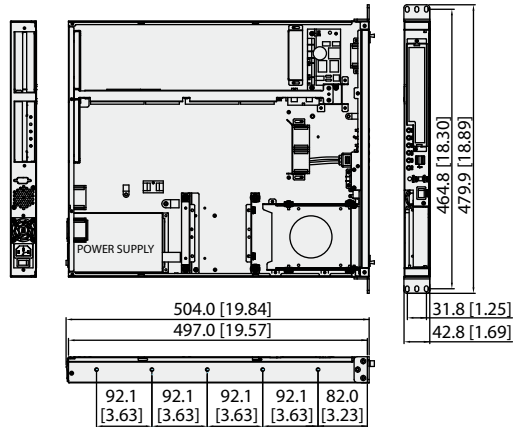


### ACP-1320BP

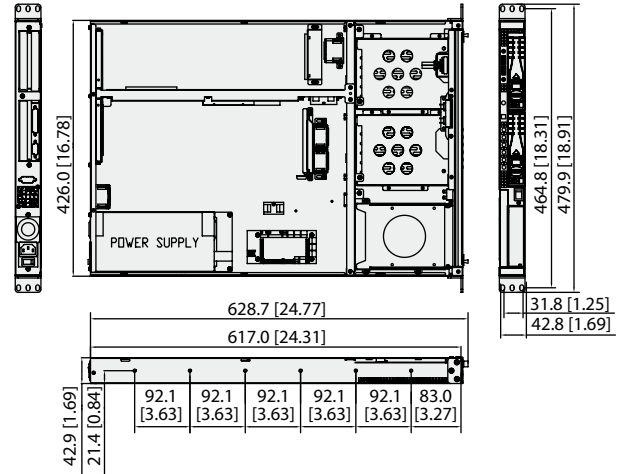

### ACP-1010MB

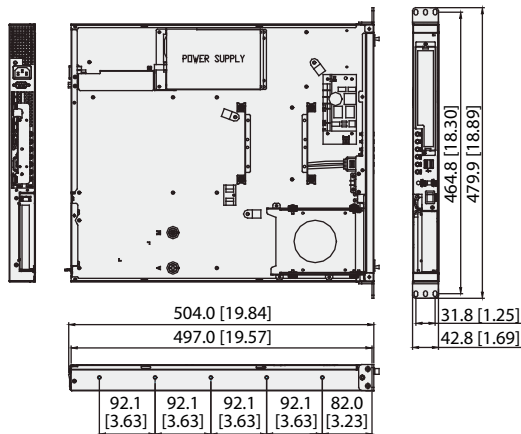

### ACP-1320MB

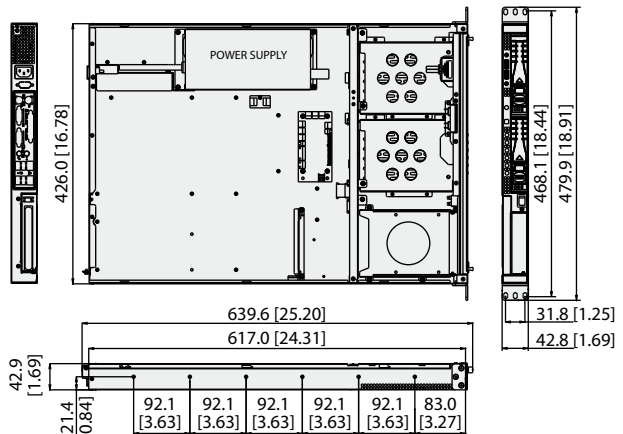

## Ordering Information

Model Name	Power Supply
<b>Backplane Version</b>	
ACP-1010BP-00XE	-
ACP-1010BP-30ZE	1757000160G
ACP-1320BP-00XE	-
ACP-1320BP-30ZE	1757000160G
<b>Motherboard Version</b>	
ACP-1010MB0-00XE	-
ACP-1010MB0-30ZE	1757000263
ACP-1320MB0-00XE	-
ACP-1320MB0-30ZE	1757000263

\*ACP-1010MB/1320 MB does not support AIMB-763, 542, 562, 564 and 566 (with DVI port) because the height of the audio connector is over 1U.

## Optional Accessories

Part Name	Description
2130007889S000	Filter 170 x 32 x 5 mm for ACP-1010
96SDVR-8X-ST-SN-B	Black slim SATA 8X DVD-RW ROM
96CB-SATAPOWER-6P	SATA power wire 6-pin to big 4-pin
9662132000E	Black 3.5" mobile HDD tray

## Power Supply Options

Part Name	Watts	Specifications Input
BP: 1757001797 (ATX, PFC)	250 W	AC 100 ~ 240 V (full-range)
MB: 1757001457 (ATX, PFC)		
BP: 1757000160G (ATX, PFC)	300 W	AC 100 ~ 240 V (full-range)
MB: 1757000263 (ATX, PFC)		

## Backplane Options

Part Name	Slot	CPU Card
<b>PICMG 1.3</b>		
PCE-5B03V-01A1E	one CPU, one PCIe x 16, one PCI (32-bit/33 MHz)	PCE-5124/5130
PCE-5B03V-00A1E	one CPU, one PCIe x 16, one PCIe x 4	
<b>PICMG 1.0</b>		
PCA-6103P2V-0A2E	one CPU, 2 PCI (32-bit/33 MHz)	PCA-6010/6194