

# Squirrel SQ2020 Wi-Fi

Powerful data loggers for all applications

## Overview


The Squirrel SQ2020 Wi-Fi hand held data logger combines high performance and universal inputs with the simplicity of Wi-Fi networking in a compact and easy-to-use instrument.

Using high accuracy, 24-bit analogue to digital converters, removable memory and Wi-Fi wireless Ethernet networking, the SQ2020 Wi-Fi is the ideal data logger for industrial, scientific research and quality assurance applications. Together with our comprehensive suite of software, SquirrelView, the SQ2020 provides standalone data acquisition, simple Wi-Fi networking, real-time metering and data analysis straight out-of-the-box.



## Key features

- 8 true differential or 16 single ended universal analogue inputs for voltage, current or resistance measurements plus 2 high voltage, 4 pulse and 8 digital event/state inputs
- Analogue inputs can be used with thermistors, thermocouples, 2, 3 or 4 wire RTD temperature sensors and 4-20mA signals
- Logging rates of up to 100Hz on up to two channels
- Large non-volatile internal memory storage for up to 14 million readings
- Standard (802.11b) wireless (Wi-Fi) Ethernet networking, USB and RS232 communication ports
- Download of internal data to removable MMC/SD (Multi Media Card / Secure Digital) memory
- Sensor power and FET outputs for use with external devices
- Easy to read LCD and simple 4 button user interface
- Up to 16 calculated / derived channels may be created using mathematical functions

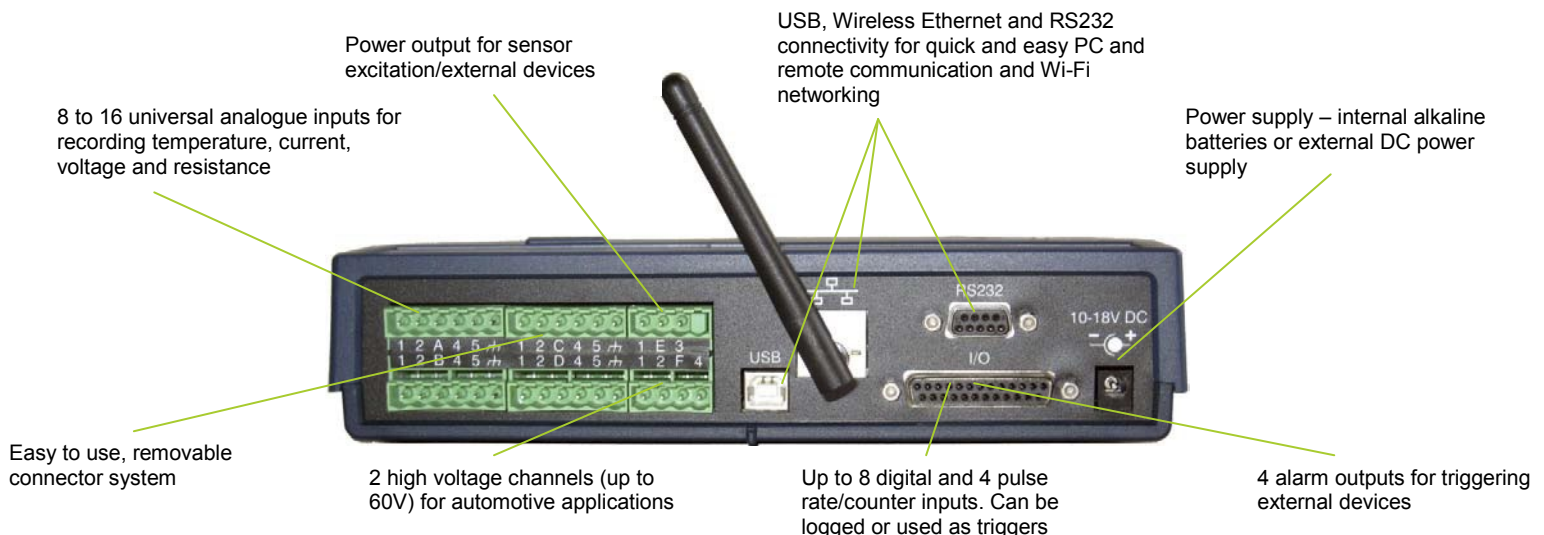

## Communications:

Wireless Ethernet, USB and RS232 serial ports are in-built. This allows simple wireless connection to a PC based TCP/IP network, or to a GSM modem for remote data downloading. This flexibility enables global data access and retrieval as well as complete system integration of the SQ2020 Wi-Fi into complex and critical applications.

## Multiple configurations stored in the logger:

Up to six logger configurations (channel type, names, logging speeds, triggers etc), together with the current configuration, can be held in the logger's internal memory. Additional configuration settings can also be loaded from the external MMC/SD memory card. This allows the operator to quickly and easily switch between logger configurations without the need for a PC.

### Comprehensive software configuration via SquirrelView:

The SquirrelView software (supplied with the SQ2020 Wi-Fi) allows logger configuration, data download and data export whilst giving the user full control over the SQ2020. The optional SquirrelView Plus gives the user access to many advanced data analysis and data archiving/transfer features. Please refer to our separate SquirrelView data sheet for all of its advanced features.

### Concurrent sampling:

The SQ2020 uses multiple analogue to digital converters that enable true concurrent sampling and logging. This allows the user to configure a channel to log at a rate of 100Hz whilst retaining different sample speeds on other channels. This makes the SQ2020 Wi-Fi ideal for measuring dynamic parameters that change at different rates such as temperature and pressure.

## System specifications:

### Input channels:

Analogue input channel options	SQ2020 2F8 WI-FI	
	Analogue to digital converters	2
	Differential	8
	Single ended*	16
Additional channels	3 or 4 wire	4
	Pulse	(2 x fast – 64kHz) & (2 x slow – 100Hz)
	Event/digital	8 state inputs or 1 x 8 bit binary
	High voltage	2
	Internal channels	1 temperature

\*Please refer to our Technical Note for the configuration of these inputs

### Standard ranges for temperature channels:

Each channel can be individually set to any of the ranges listed below. Pt100 to IEC751 and JIS1604 and Pt1000 to IEC751.

Input type	Ranges °C	Ranges °F
Y & U: Thermistor	-50 to 150	-58 to 302
Pt100/Pt1000*	-200 - 850	-328 to 1562

\*2 wire only on 1F8

Input type	Ranges °C	Ranges °F
K: Thermocouple	-200 to 1372	-328 to 2501
T: Thermocouple	-200 to 400	-328 to 752
J: Thermocouple	-200 to 1200	-328 to 2192
N: Thermocouple	-200 to 1300	-328 to 2372
R & S: Thermocouple	-50 to 1768	-58 to 3214

### Standard ranges for d.c. voltage:

Each voltage channel can be any of the voltage ranges below. Mixed differential and single ended configurations are permitted. Please refer to our Technical Note for the permitted combinations of inputs.

Voltage range	Voltage range	High voltage input range*
-0.075 to 0.075V	-3.0 to 3.0V	4.0 to 20.0V
-0.15 to 0.15V	-6.0 to 6.0V	4.0 to 40.0V
-0.3 to 0.3V	-6.0 to 12.0V	4.0 to 60.0V
-0.6 to 0.6V	-6.0 to 25.0V	
-0.6 to 1.2V		
-0.6 to 2.4V		

\*max of 2 may be selected

### Standard ranges for current and resistance channels:

Each current channel can be any of the current ranges below. Current ranges use differential input channels.

Current range (External 10Ω shunt)	Resistance range 2 wire	Resistance range 3 and 4 wire (2F8 version)
-30.0 to 30.0mA	0.0 to 1250.0Ω	0.0 to 500.0Ω
4 to 20mA	0.0 to 5000.0Ω	0.0 to 4000.0Ω
	0.0 to 20000.0Ω	
	0.0 to 300000.0Ω	

### Analogue inputs

Accuracy: (at 25°C) voltage and resistance  
± (0.05% readings + 0.025% range)  
Common mode rejection: 100dB  
Input impedance: > 1M Ω  
Linearity: 0.015%  
Series mode line rejection: 50/60Hz  
100dB

### Analogue – digital conversion

Type: Sigma-Delta  
Resolution: 24bit  
Sampling rate: up to 10, 20\* or 100\*  
readings per second per ADC.

\* With mains rejection off

### Alarm outputs

4 x open drain FET (18V 0.1A)

### Power output for external device

Regulated 5 VDC at 50mA or logger  
supply voltage at 100mA

### Time and date

In-built clock in 3 formats

### Scaling data

Displays readings in preferred  
engineering units

### Memory

Internal: up to 128Mb (Up to  
14,000,000 readings)  
External: Up to 1 GB (approx. 100  
million readings) - removable  
MMC/SD (For transferring internal  
memory and storing setups only)

### Calculated channels

Up to 16 virtual channels derived from  
physical input channels

### Resolution

Up to 6 significant digits

### Programming/logger setup

SquirrelView or SquirrelView Plus  
software

### Communications

Wireless Ethernet (Wi-Fi):  
802.11b, 2.4GHz, 1 to 14 channels  
Security: Open, WEP (64 or 128bit  
encryption), WPA or WPA2 / 802.11i  
Network: Infrastructure only with  
specified SSID, or any network with  
no SSID (external mains power  
required for Wi-Fi connection)  
RS232: (Auto bauding to 115 K baud)  
USB: 1.1 and 2.0 compatible  
External options: GSM, WIFI and  
PSTN Modems

### Power supply

Internal: 6 x AA Alkaline batteries  
External: 10-18VDC  
Reverse polarity and over-voltage  
protected

### Power consumption @ 9V

Sleep mode: 600µA  
Logging: 40-80mA

### Dimensions and weight

Dimensions: W235 x D175 x H55mm  
Weight: Approx 1.2kgs  
Enclosure material: ABS

### Memory modes (internal only)

Stop when full or overwrite

### Display and keypad

2 line x 20 character LCD display  
Battery state and external power  
indicator  
Keypad lock  
Navigate to:  
Arm/disarm/pause/continue  
Meter any channel or alarm  
Select from up to 6 x pre-stored  
setups  
Status/diagnostics/memory/time  
and date  
Download to MMC/SD

### Operating environment

-30°C to +65°C  
Humidity: 90% at 40°C non-  
condensing

### Accessories

MPU 12V: Universal (97-263V  
AC) power supply  
LC76: DC lead  
SQ20RB12-6: External  
rechargeable battery (12V, 6Ah)  
SB102: 25 way digital I/O  
connector  
CS202: Current shunt kit (4 x 10Ω  
□D.125W□  
PEL4: Rugged weather proof  
enclosure  
CAL2020: Test and Calibration  
certificates  
SQ20A802: External GSM  
communications kit  
MMC64: Multi Media Card  
(Please see price list for additional  
accessories)

**Please note:** SQ2020 Wi-Fi is  
supplied complete with software,  
manual, USB cable, wall bracket,  
batteries and 4 current shunt  
resistors

# Grant

Grant Instruments (Cambridge) Ltd  
Shepreth, Cambridgeshire SG8 6BG  
England

Tel: +44 (0) 1763 260 811  
Fax: +44 (0) 1763 262 410  
Email: [acquisitionsales@grant.co.uk](mailto:acquisitionsales@grant.co.uk)

[www.grant.co.uk](http://www.grant.co.uk)

Grant data loggers and specialist technical support is available world-wide. Please visit [www.grant.co.uk](http://www.grant.co.uk) to locate our regional offices and to download technical support materials. You will also find your locally appointed distributor and support centre.

Grant data logging systems bear a CE mark and meet relevant European directives.

Grant Instruments operates a Quality Management System complying with ISO9001:2000. It is Grant's policy to supply customers with products which are fit for their intended purpose, safe in use, perform reliably to published specification and are backed by a fast and efficient customer service.

All specifications are subject to continuous development and Grant Instruments (Cambridge) Ltd reserves the right to alter them without prior notice.

All trademarks acknowledged.

**BMC** DR. SCHETTER

**Dr. Schetter BMC GmbH**  
Boschstrasse 12  
82178 Puchheim

TEL **089 800 694-0**  
FAX 089 800 694-29  
[www.bmc.de](http://www.bmc.de)

